


Chapter 4: Network Layer, partb

The slides are adaptations of the slides available by the main textbook authors, Kurose&Ross


Chapter 4: Network Layer

- ❑ 4.1 Introduction
- ❑ 4.2 Virtual circuit and datagram networks
- ❑ 4.3 What's inside a router
- ❑ 4.4 IP: Internet Protocol
 - Datagram format
 - IPv4 addressing
 - ICMP
 - IPv6
- ❑ 4.5 **Routing algorithms**
 - Link state
 - Distance Vector
 - Hierarchical routing
- ❑ 4.6 Routing in the Internet
 - RIP
 - OSPF
 - BGP
- ❑ 4.7 Broadcast and multicast routing

Interplay between routing, forwarding

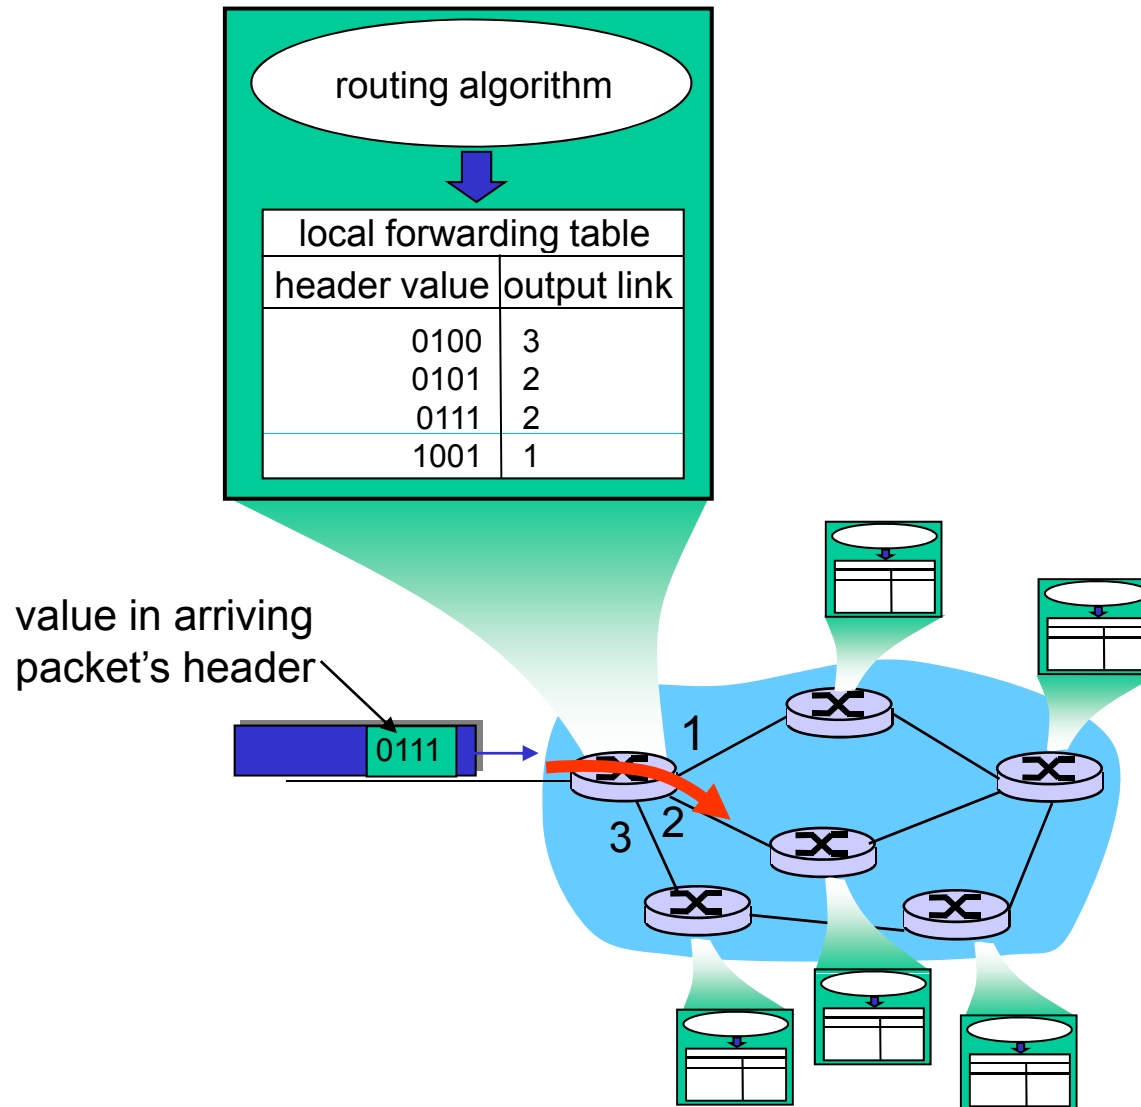

Graph abstraction

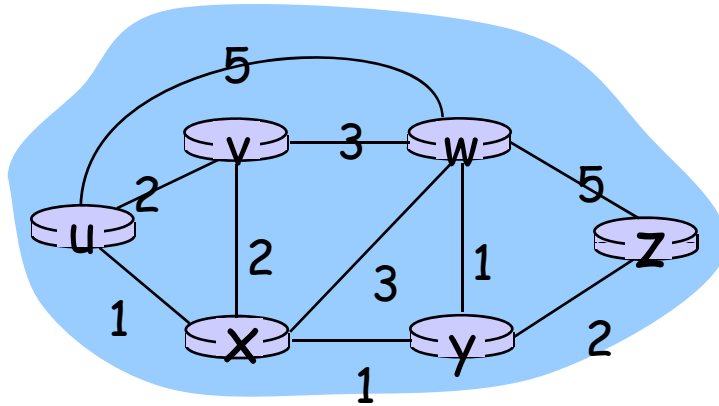

Graph: $G = (N, E)$

N = set of routers = $\{ u, v, w, x, y, z \}$

E = set of links = $\{ (u,v), (u,x), (v,x), (v,w), (x,w), (x,y), (w,y), (w,z), (y,z) \}$

- $c(x, x') = \text{cost of link } (x, x')$
- e.g., $c(w, z) = 5$

- cost could always be 1, or inversely related to bandwidth, or inversely related to congestion

Cost of path $(x_1, x_2, x_3, \dots, x_p) = c(x_1, x_2) + c(x_2, x_3) + \dots + c(x_{p-1}, x_p)$

Question: What's the least-cost path between u and z ?

Routing algorithm: algorithm that finds least-cost path

Routing Algorithm classification

Global or decentralized information?

Global:

- ❑ all routers have complete topology, link cost info
- ❑ "link state" algorithms

Decentralized:

- ❑ router knows physically-connected neighbors, link costs to neighbors
- ❑ iterative process of computation, exchange of info with neighbors
- ❑ "distance vector" algorithms

Static or dynamic?

Static:

- ❑ routes change slowly over time

Dynamic:

- ❑ routes change more quickly
 - periodic update
 - in response to link cost changes

Chapter 4: Network Layer

- ❑ 4.1 Introduction
- ❑ 4.2 Virtual circuit and datagram networks
- ❑ 4.3 What's inside a router
- ❑ 4.4 IP: Internet Protocol
 - Datagram format
 - IPv4 addressing
 - ICMP
 - IPv6
- ❑ 4.5 Routing algorithms
 - Link state
 - Distance Vector
 - Hierarchical routing
- ❑ 4.6 Routing in the Internet
 - RIP
 - OSPF
 - BGP
- ❑ 4.7 Broadcast and multicast routing

A Link-State Routing Algorithm

Dijkstra's algorithm

- ❑ net topology, link costs known to all nodes
 - accomplished via "link state broadcast"
 - all nodes have same info
- ❑ computes least cost paths from one node ('source') to all other nodes
 - gives forwarding table for that node
- ❑ iterative: after k iterations, know least cost path to k dest.'s

Notation:

- ❑ $c(x,y)$: link cost from node x to y; $= \infty$ if not direct neighbors
- ❑ $D(v)$: current value of cost of path from source to dest. v
- ❑ $p(v)$: predecessor node along path from source to v
- ❑ N' : set of nodes whose least cost path definitively known

Dijkstra's Algorithm

1 **Initialization:**

2 $N' = \{u\}$

3 for all nodes v

4 if v adjacent to u

5 then $D(v) = c(u,v)$

6 else $D(v) = \infty$

7

8 **Loop**

9 find w not in N' such that $D(w)$ is a minimum

10 add w to N'

11 update $D(v)$ for all v adjacent to w and not in N' :

12 $D(v) = \min(D(v), D(w) + c(w,v))$


13 /* new cost to v is either old cost to v or known

14 shortest path cost to w plus cost from w to v */

15 **until all nodes in N'**


Dijkstra's algorithm: example

Step	N'	D(v),p(v)	D(w),p(w)	D(x),p(x)	D(y),p(y)	D(z),p(z)
0	u	2,u	5,u	1,u	∞	∞
1	ux	2,u	4,x		2,x	∞
2	uxy	2,u	3,y			4,y
3	uxyv		3,y			4,y
4	uxyvw					4,y
5	uxyvwz					

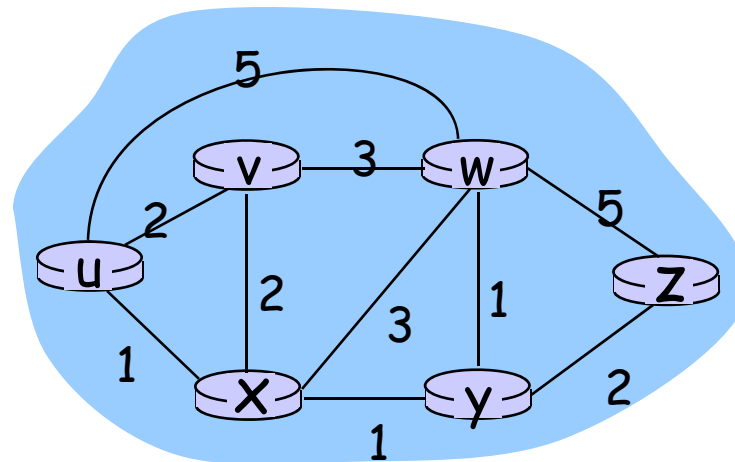

Dijkstra's algorithm: example (2)

Resulting shortest-path tree from u:

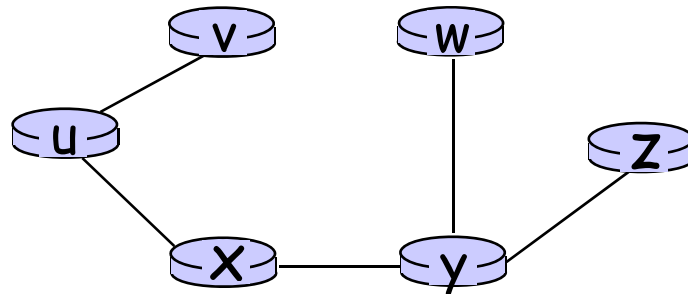

Resulting forwarding table in u:

destination	link
v	(u,v)
x	(u,x)
y	(u,x)
w	(u,x)
z	(u,x)





Dijkstra's algorithm, discussion

Algorithm complexity: n nodes

- each iteration: need to check all nodes, w , not in N
- $n(n+1)/2$ comparisons: $O(n^2)$
- more efficient implementations possible: $O(n \log n)$

Oscillations possible:

- e.g., link cost = amount of carried traffic

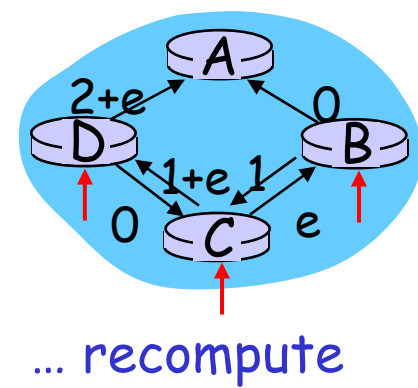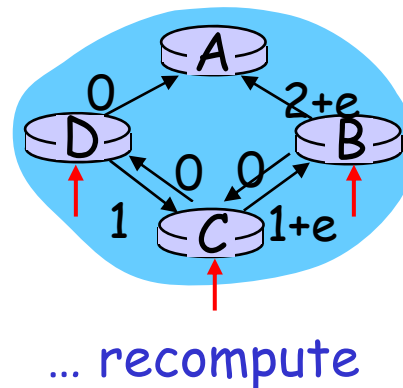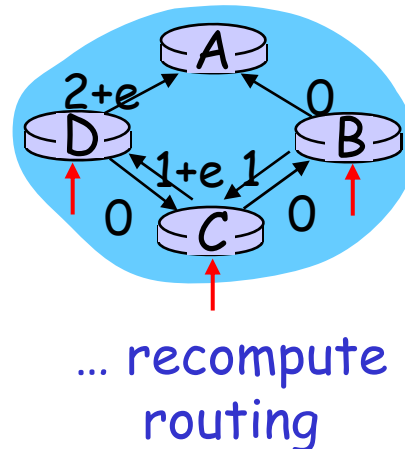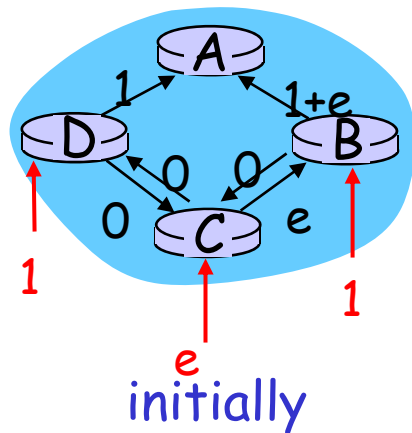

Chapter 4: Network Layer

- ❑ 4.1 Introduction
- ❑ 4.2 Virtual circuit and datagram networks
- ❑ 4.3 What's inside a router
- ❑ 4.4 IP: Internet Protocol
 - Datagram format
 - IPv4 addressing
 - ICMP
 - IPv6
- ❑ 4.5 Routing algorithms
 - Link state
 - Distance Vector
 - Hierarchical routing
- ❑ 4.6 Routing in the Internet
 - RIP
 - OSPF
 - BGP
- ❑ 4.7 Broadcast and multicast routing

Distance Vector Algorithm

Bellman-Ford Equation

Define


$d_x(y) :=$ cost of least-cost path from x to y

Then

$$d_x(y) = \min_v \{c(x,v) + d_v(y)\}$$

where min is taken over all neighbors v of x

Bellman-Ford example

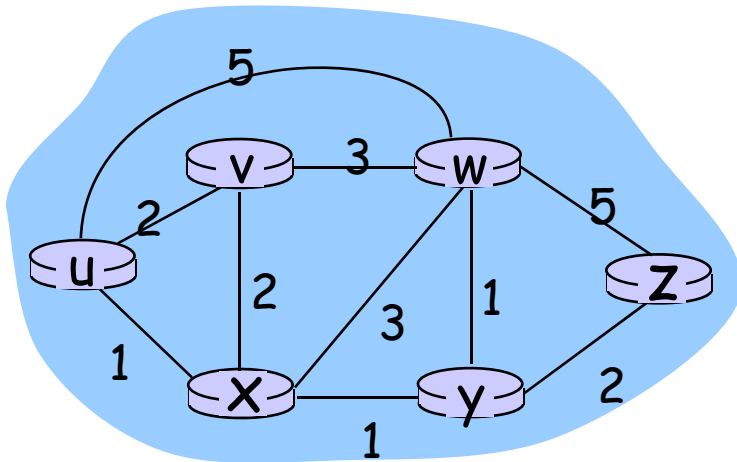

Clearly, $d_v(z) = 5$, $d_x(z) = 3$, $d_w(z) = 3$

B-F equation says:

$$\begin{aligned} d_u(z) &= \min \{ c(u,v) + d_v(z), \\ &\quad c(u,x) + d_x(z), \\ &\quad c(u,w) + d_w(z) \} \\ &= \min \{ 2 + 5, \\ &\quad 1 + 3, \\ &\quad 5 + 3 \} = 4 \end{aligned}$$

Node that achieves minimum is next
hop in shortest path → forwarding table

Distance Vector Algorithm

- $D_x(y)$ = estimate of least cost from x to y
- Node x knows cost to each neighbor v :
 $c(x,v)$
- Node x **maintains** distance vector $D_x = [D_x(y): y \in N]$
- Node x also **needs to know** its neighbors' distance vectors
 - For each neighbor v , x knows
 $D_v = [D_v(y): y \in N]$

Distance vector algorithm (4)

Basic idea:

- ❑ From time-to-time, each node sends its own distance vector estimate to neighbors
- ❑ Asynchronous
- ❑ When a node x receives new DV estimate from neighbor, it updates its own DV using B-F equation:

$$D_x(y) \leftarrow \min_v \{c(x,v) + D_v(y)\} \quad \text{for each node } y \in N$$

- ❑ Under minor, natural conditions, the estimate $D_x(y)$ converges to the actual least cost $d_x(y)$

Distance Vector Algorithm (5)

Iterative, asynchronous:


each local iteration caused by:

- ❑ local link cost change
- ❑ DV update message from neighbor

Distributed:

- ❑ each node notifies neighbors *only* when its DV changes
 - neighbors then notify their neighbors if necessary

Each node:

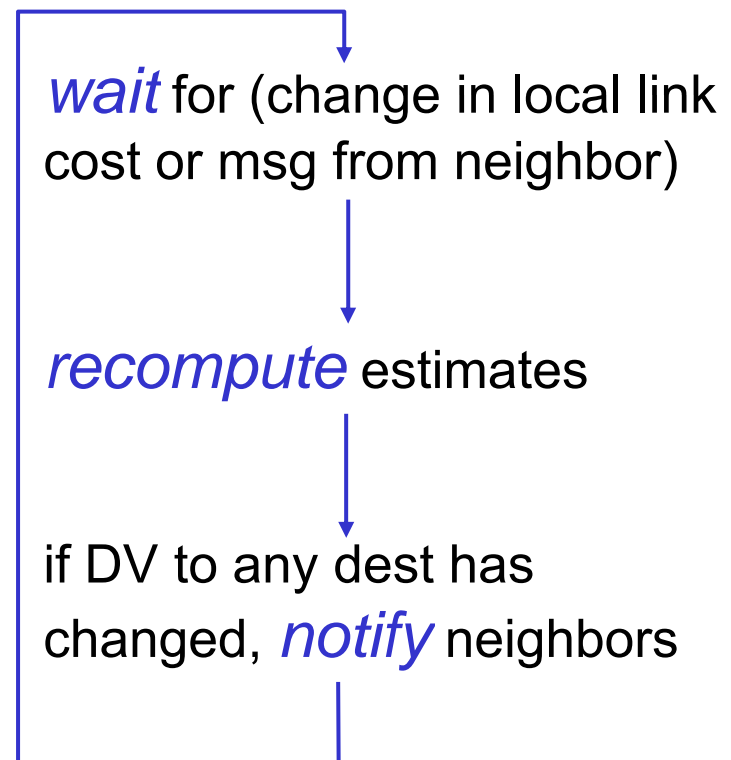

$$D_x(y) = \min\{c(x,y) + D_y(y), c(x,z) + D_z(y)\} \\ = \min\{2+0, 7+1\} = 2$$

$$D_x(z) = \min\{c(x,y) + D_y(z), c(x,z) + D_z(z)\} \\ = \min\{2+1, 7+0\} = 3$$

node x table

		cost to		
from		x	y	z
	x	0	2	7
	y	∞	∞	∞
	z	∞	∞	∞


node y table

		cost to		
from		x	y	z
	x	∞	∞	∞
	y	2	0	1
	z	∞	∞	∞

node z table

		cost to		
from		x	y	z
	x	∞	∞	∞
	y	∞	∞	∞
	z	7	1	0

		cost to		
from		x	y	z
	x	0	2	3
	y	2	0	1
	z	7	1	0

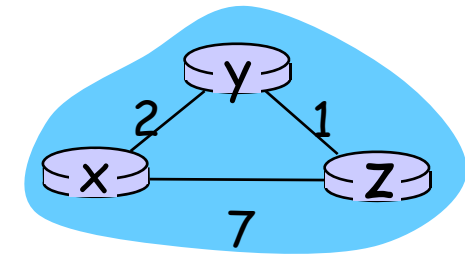

time →

$$D_x(y) = \min\{c(x,y) + D_y(y), c(x,z) + D_z(y)\}$$

$$= \min\{2+0, 7+1\} = 2$$

$$D_x(z) = \min\{c(x,y) + D_y(z), c(x,z) + D_z(z)\}$$

$$= \min\{2+1, 7+0\} = 3$$

node x table

		cost to		
		x	y	z
from	x	0	2	7
	y	∞	∞	∞
	z	∞	∞	∞

node y table

		cost to		
from		x	y	z
	x	∞	∞	∞
	y	2	0	1
	z	∞	∞	∞

node z table

		cost to		
		x	y	z
from	x	∞	∞	∞
	y	∞	∞	∞
	z	7	1	0

		cost to		
		x	y	z
from	x	0	2	3
	y	2	0	1
	z	7	1	0


		cost to		
from		x	y	z
	x	0	2	7
	y	2	0	1
	z	7	1	0

		cost to		
from		x	y	z
	x	0	2	7
	y	2	0	1
	z	3	1	0

		cost to		
		x	y	z
from	x	0	2	3
	y	2	0	1
	z	3	1	0

		cost to		
from		x	y	z
	x	0	2	3
	y	2	0	1
	z	3	1	0

		cost to		
		x	y	z
from	x	0	2	3
	y	2	0	1
	z	3	1	0

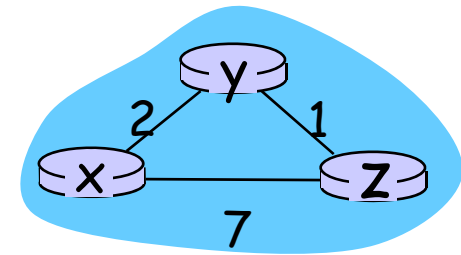


.....→ time

Distance Vector: link cost changes

Link cost changes:

- ❑ node detects local link cost change
- ❑ updates routing info, recalculates distance vector
- ❑ if DV changes, notify neighbors

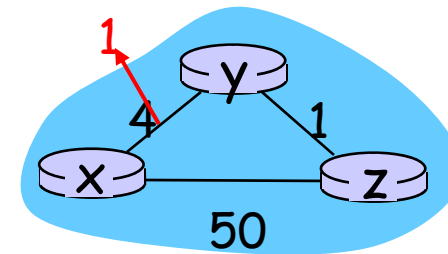

“good
news
travels
fast”

At time t_0 , y detects the link-cost change, updates its DV, and informs its neighbors.


At time t_1 , z receives the update from y and updates its table. It computes a new least cost to x and sends its neighbors its DV.

At time t_2 , y receives z 's update and updates its distance table. y 's least costs do not change and hence y does *not* send any message to z .


Distance Vector: link cost changes

Link cost changes:

- node detects local link cost change
- updates distance table
- if cost change in least cost path, notify neighbors

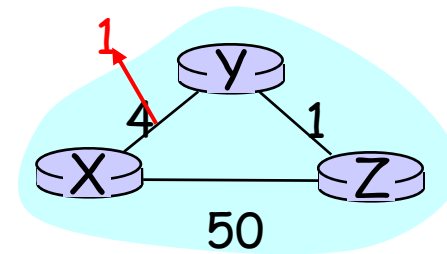



“good news travels fast”

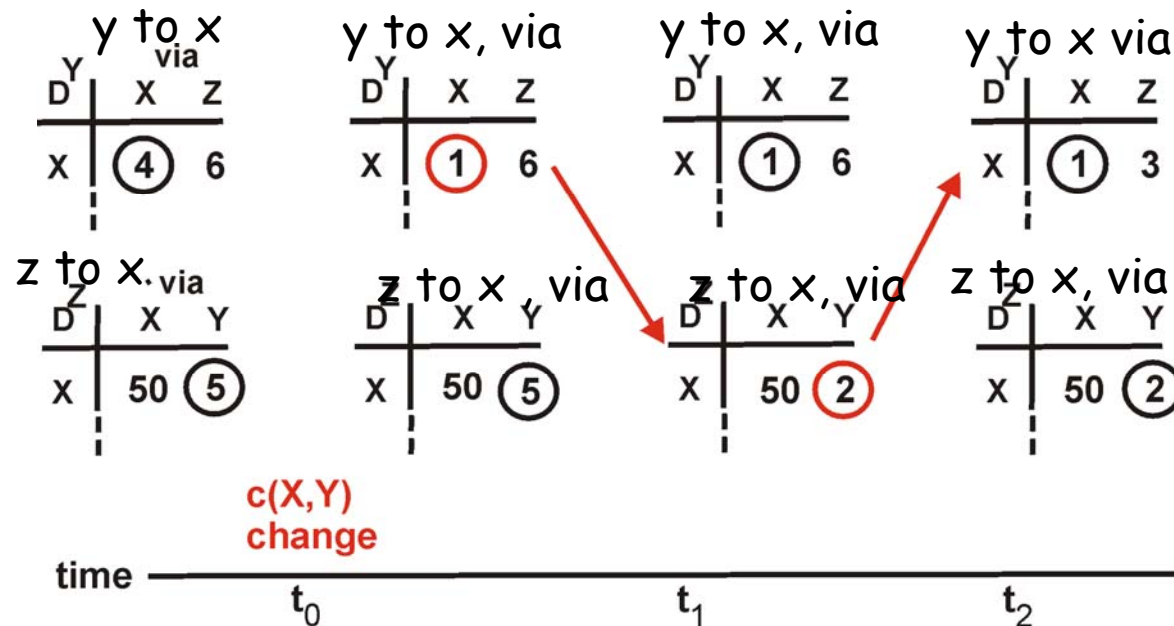

Distance Vector: link cost changes

Link cost changes:



- ❑ good news travels fast
- ❑ bad news travels slow (watch: loops!) - "count to infinity" problem!

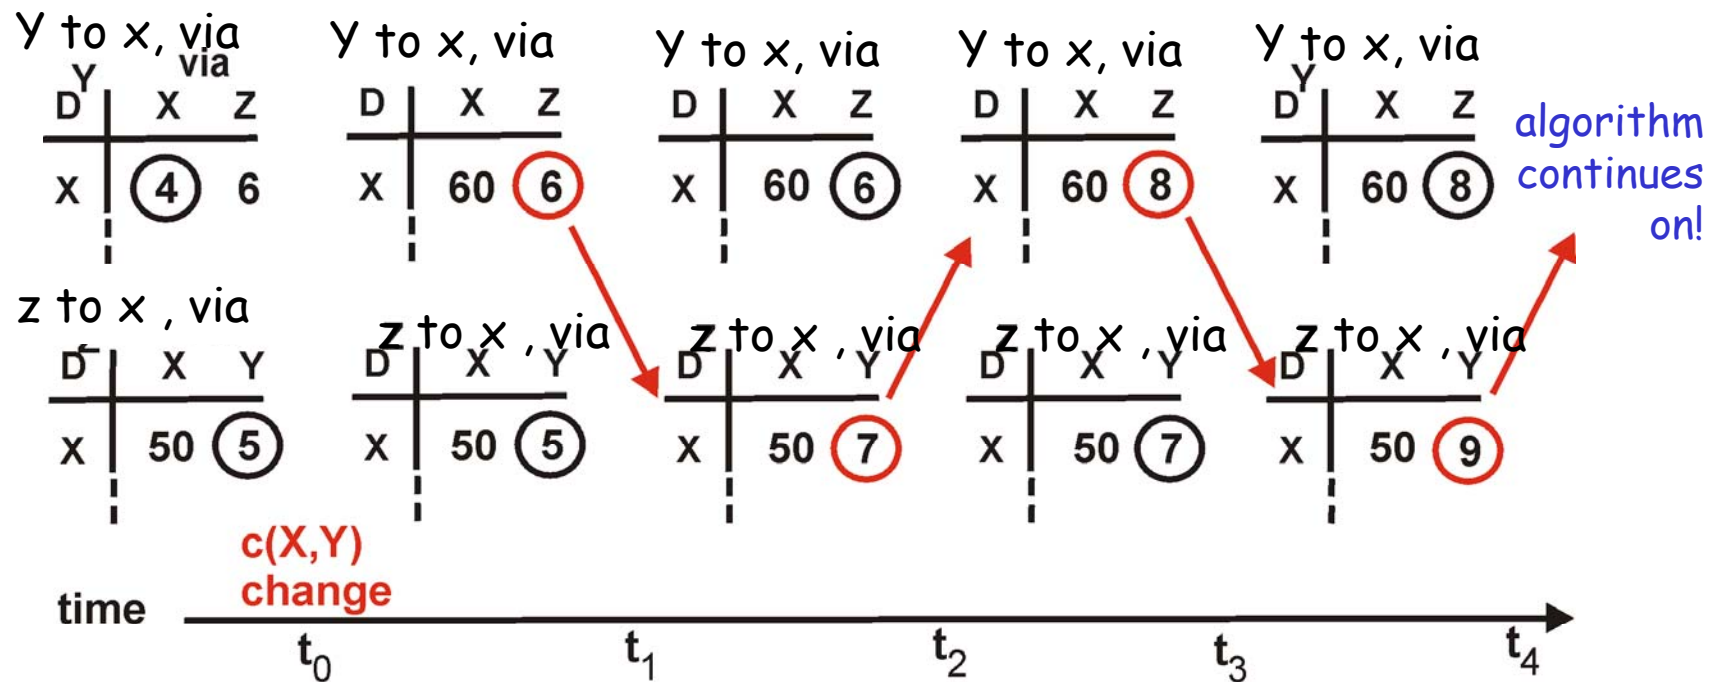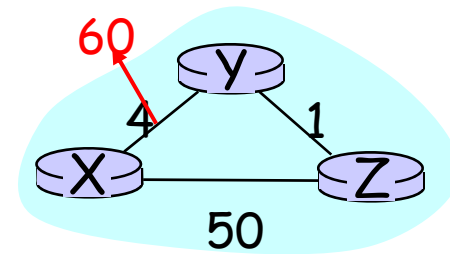

Distance Vector: poisoned reverse

If Z routes through Y to get to X :


- Z tells Y its (Z's) distance to X is infinite (so Y won't route to X via Z)
- will this completely solve count to infinity problem?

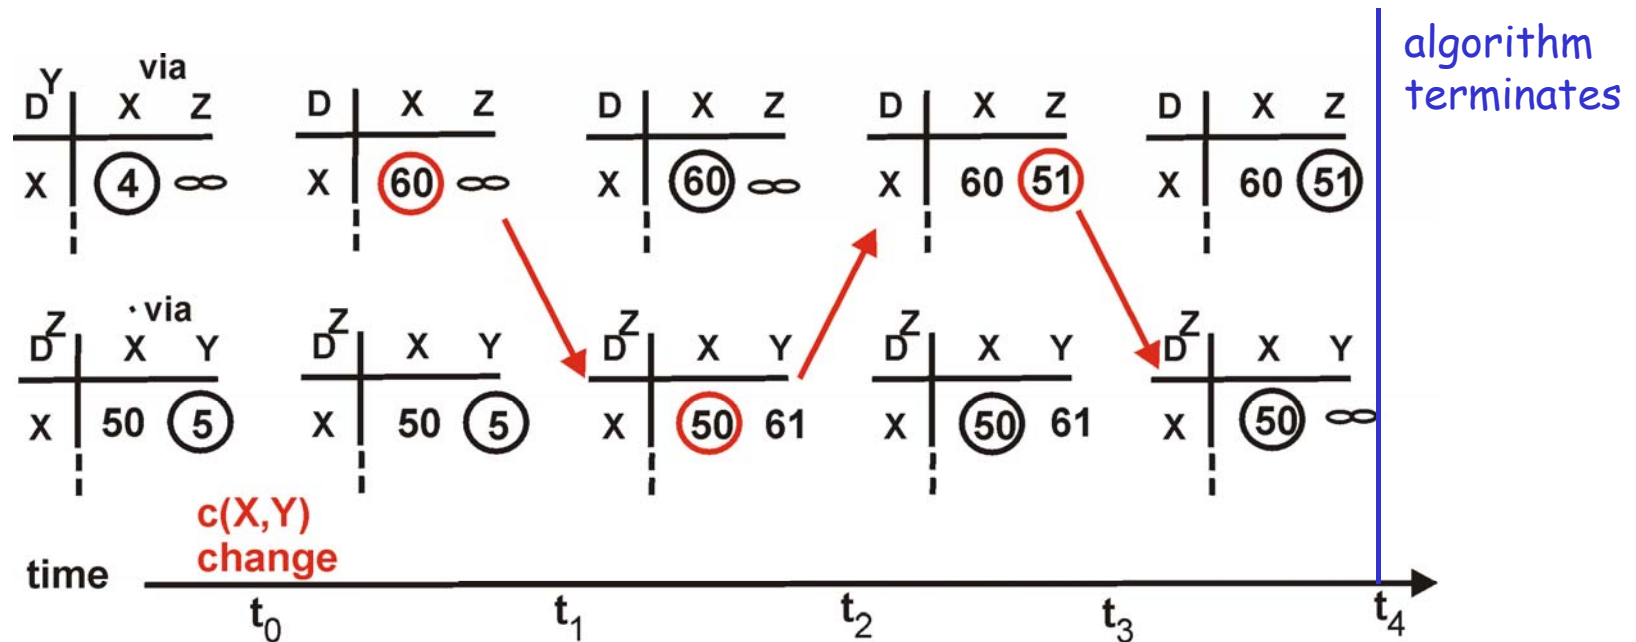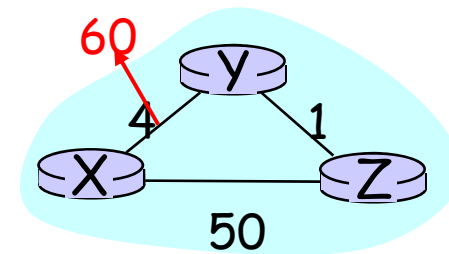

Distance Vector: count to infinity problem: way out?

Poisoned reverse:

- ❑ If Z routes through Y to get to X :
 - Z tells Y its (Z's) distance to X is infinite (so Y won't route to X via Z)
- ❑ will this completely solve count to infinity problem?

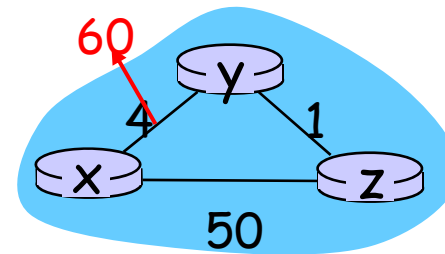

Comparison of LS and DV algorithms

Message complexity

- LS: with n nodes, E links, $O(nE)$ msgs sent
- DV: exchange between neighbors only
 - convergence time varies

Speed of Convergence

- LS: $O(n^2)$ algorithm requires $O(nE)$ msgs
 - may have oscillations
- DV: convergence time varies
 - may be routing loops
 - count-to-infinity problem

Robustness: what happens if router malfunctions?

LS:

- node can advertise incorrect *link* cost
- each node computes only its *own* table

DV:

- DV node can advertise incorrect *path* cost
- each node's table used by others
 - error propagate thru network

Chapter 4: Network Layer

- ❑ 4.1 Introduction
- ❑ 4.2 Virtual circuit and datagram networks
- ❑ 4.3 What's inside a router
- ❑ 4.4 IP: Internet Protocol
 - Datagram format
 - IPv4 addressing
 - ICMP
 - IPv6
- ❑ 4.5 **Routing algorithms**
 - Link state
 - Distance Vector
 - **Hierarchical routing**
- ❑ 4.6 Routing in the Internet
 - RIP
 - OSPF
 - BGP
- ❑ 4.7 Broadcast and multicast routing

Hierarchical Routing

Recall:

- ❑ all routers identical
 - ❑ network “flat”
- ... *not* true in practice

scale: with 200 million destinations:

- ❑ can't store all dest's in routing tables!
- ❑ routing table exchange would swamp links!


administrative autonomy

- ❑ internet = network of networks
- ❑ each network admin may want to control routing in its own network


Hierarchical Routing: Interconnected ASes

Gateway router

- Direct link to router in another AS

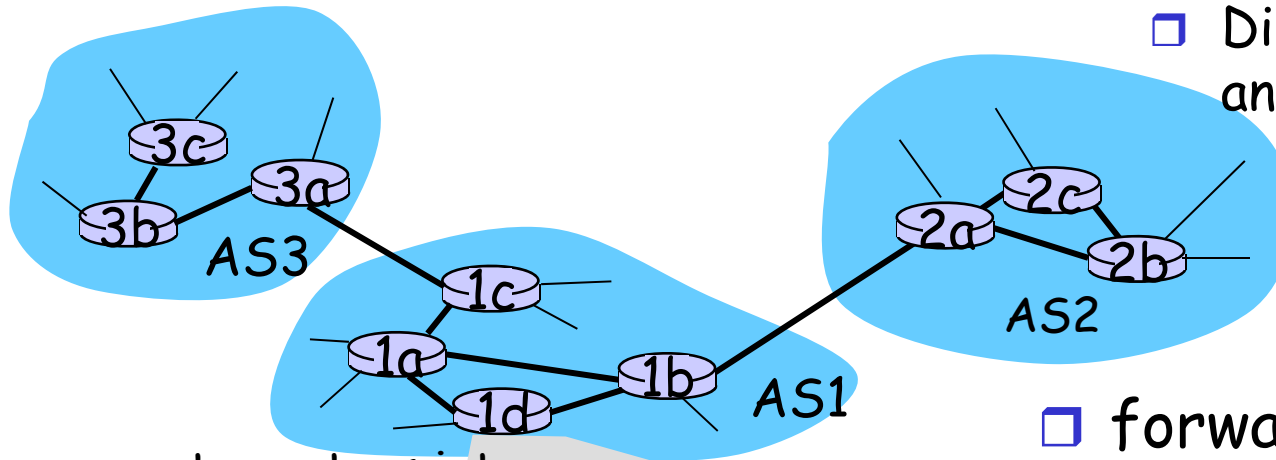

- aggregate routers into regions, "autonomous systems" (AS)
- routers in same AS run same routing protocol
 - "intra-AS" routing protocol
 - routers in different AS can run different intra-AS routing protocol

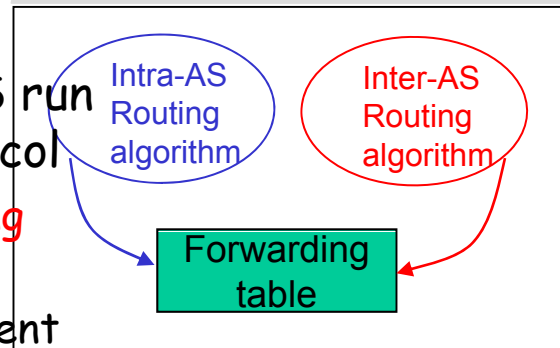

- forwarding table configured by both intra- and inter-AS routing algorithm
 - intra-AS sets entries for internal dests
 - inter-AS & intra-AS sets entries for external dests


Inter-AS tasks

- suppose router in AS1 receives datagram destined outside of AS1:
 - router should forward packet to gateway router, but which one?

AS1 must:


1. learn which destds are reachable through AS2, which through AS3
2. propagate this reachability info to all routers in AS1

Job of inter-AS routing!

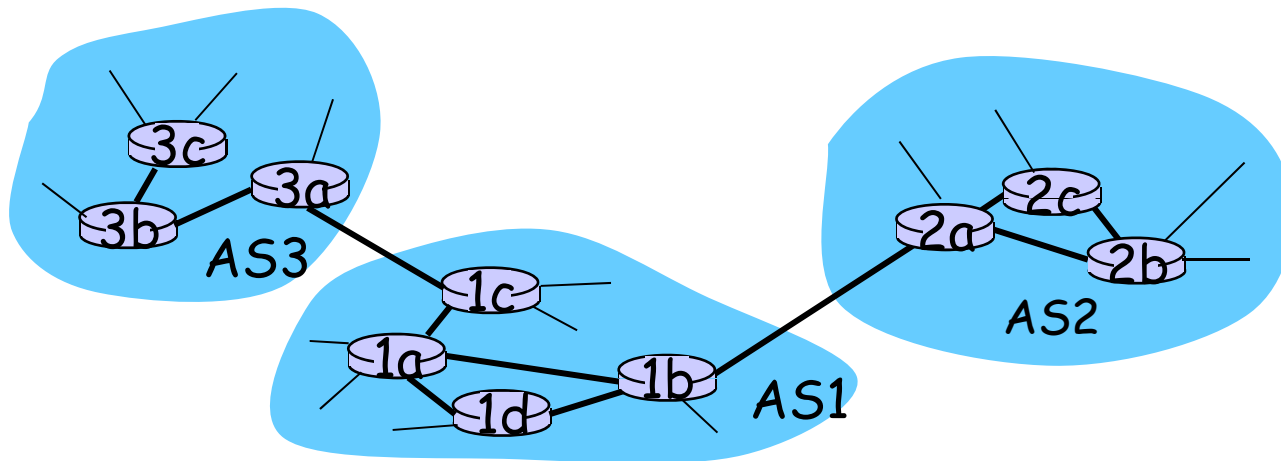


Example 1: Setting forwarding table in router 1d

- suppose AS1 learns (via inter-AS protocol) that subnet x reachable via AS3 (gateway 1c) but not via AS2.
- inter-AS protocol propagates reachability info to all internal routers.
- router 1d determines from intra-AS routing info that its interface I is on the least cost path to 1c.
 - installs forwarding table entry (x, I)

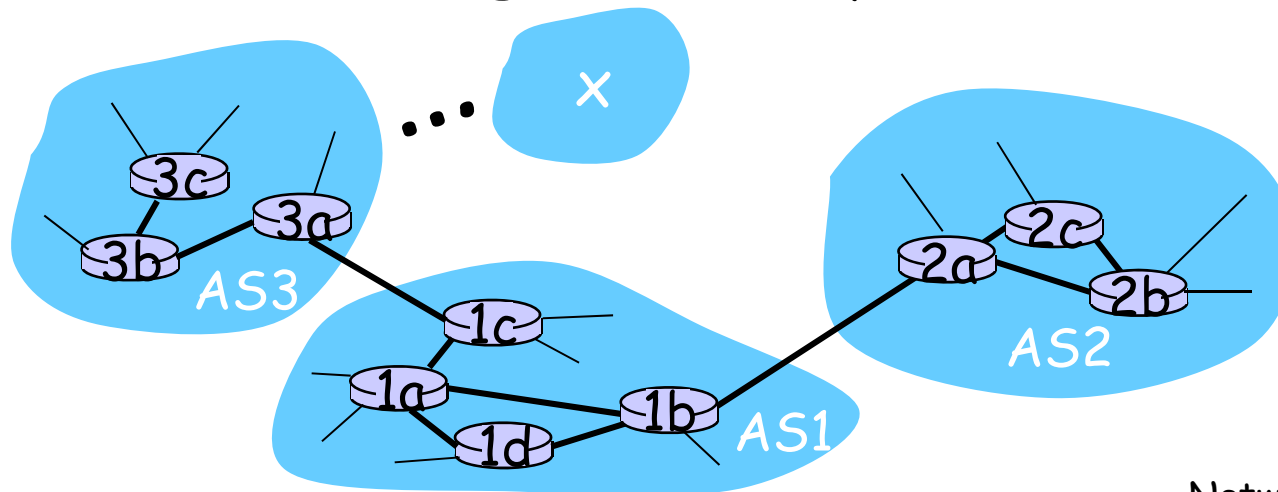


Example 2: Choosing among multiple ASes

- now suppose AS1 learns from inter-AS protocol that subnet **x** is reachable from AS3 *and* from AS2.
- to configure forwarding table, router 1d must determine towards which gateway it should forward packets for dest **x**.
 - this is also job of inter-AS routing protocol!

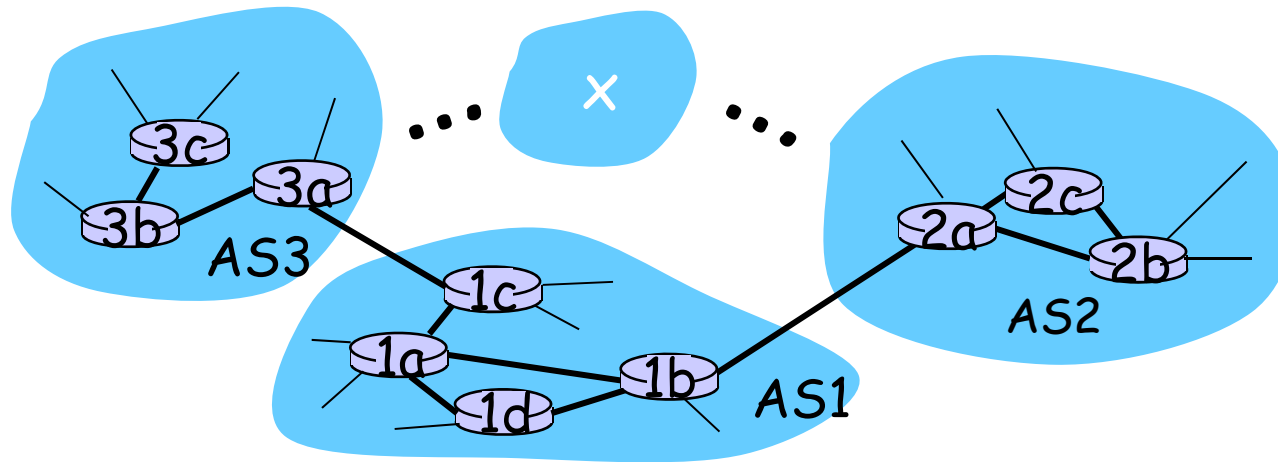

Example 2: Choosing among multiple ASes

- ❑ now suppose AS1 learns from inter-AS protocol that subnet **x** is reachable from AS3 *and* from AS2.
- ❑ to configure forwarding table, router 1d must determine towards which gateway it should forward packets for dest **x**.
 - this is also job of inter-AS routing protocol!
- ❑ **hot potato routing**: send packet towards closest of two routers.

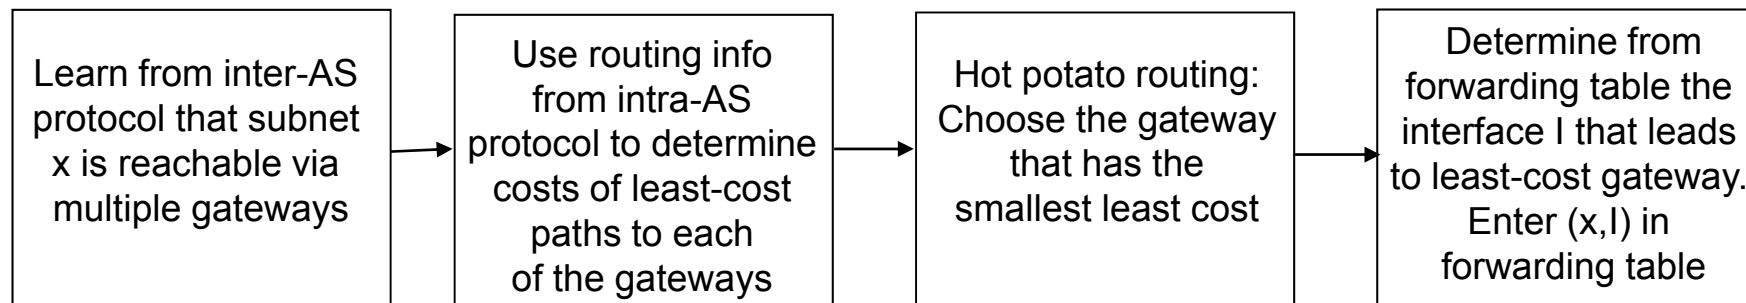

Chapter 4: Network Layer

- ❑ 4.1 Introduction
- ❑ 4.2 Virtual circuit and datagram networks
- ❑ 4.3 What's inside a router
- ❑ 4.4 IP: Internet Protocol
 - Datagram format
 - IPv4 addressing
 - ICMP
 - IPv6
- ❑ 4.5 Routing algorithms
 - Link state
 - Distance Vector
 - Hierarchical routing
- ❑ 4.6 Routing in the Internet
 - RIP
 - OSPF
 - BGP
- ❑ 4.7 Broadcast and multicast routing

Intra-AS Routing


- ❑ also known as **Interior Gateway Protocols (IGP)**
- ❑ most common Intra-AS routing protocols:
 - RIP: Routing Information Protocol
 - OSPF: Open Shortest Path First
 - IGRP: Interior Gateway Routing Protocol (Cisco proprietary)

Chapter 4: Network Layer

- ❑ 4.1 Introduction
- ❑ 4.2 Virtual circuit and datagram networks
- ❑ 4.3 What's inside a router
- ❑ 4.4 IP: Internet Protocol
 - Datagram format
 - IPv4 addressing
 - ICMP
 - IPv6
- ❑ 4.5 Routing algorithms
 - Link state
 - Distance Vector
 - Hierarchical routing
- ❑ 4.6 Routing in the Internet
 - RIP
 - OSPF
 - BGP
- ❑ 4.7 Broadcast and multicast routing

RIP (Routing Information Protocol)

- **Distance vector** algorithm, with poisoned-reverse
 - Distance metric: # of hops
 - max = 15 hops (16 = infinity)

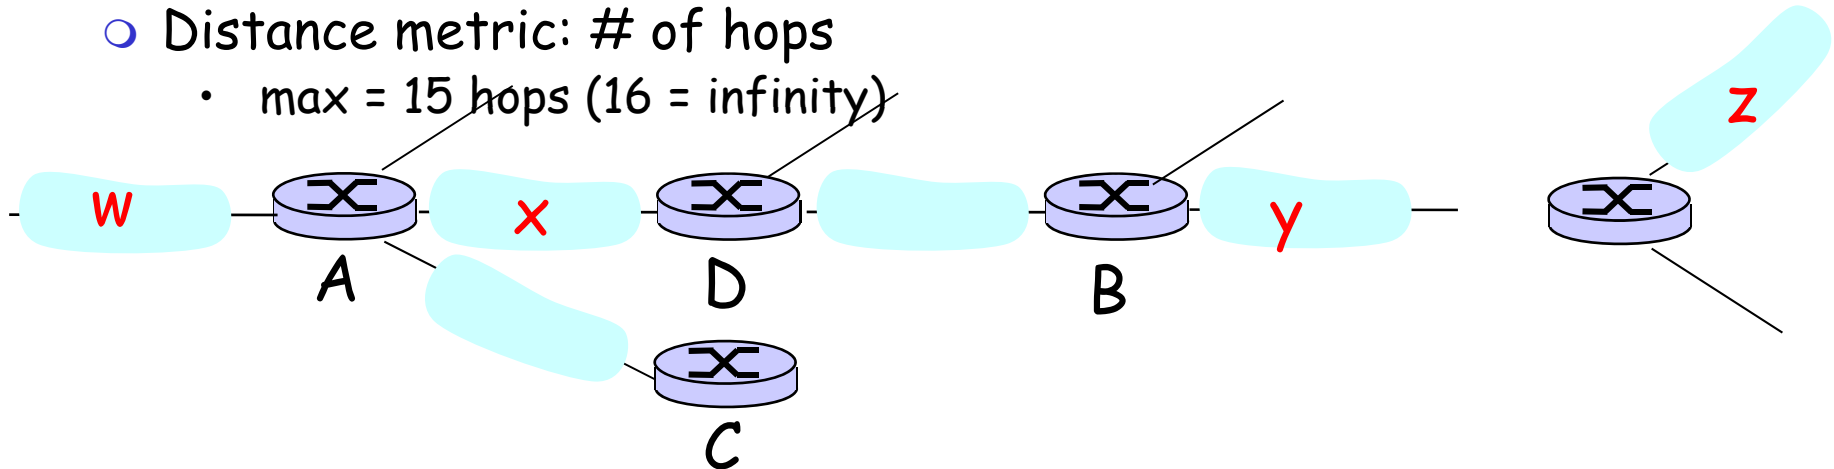


Destination Network	Next Router	Num. of hops to dest.
W	A	2
Y	B	2
Z	B	7
X	--	1
....

- Distance vectors: **advertised** every 30 sec (no advertisement heard after 180 sec --> neighbor/link declared dead)

RIP Table processing

- ❑ RIP routing tables managed by **application-level** process called route-d (daemon)
- ❑ advertisements sent in UDP packets, periodically repeated

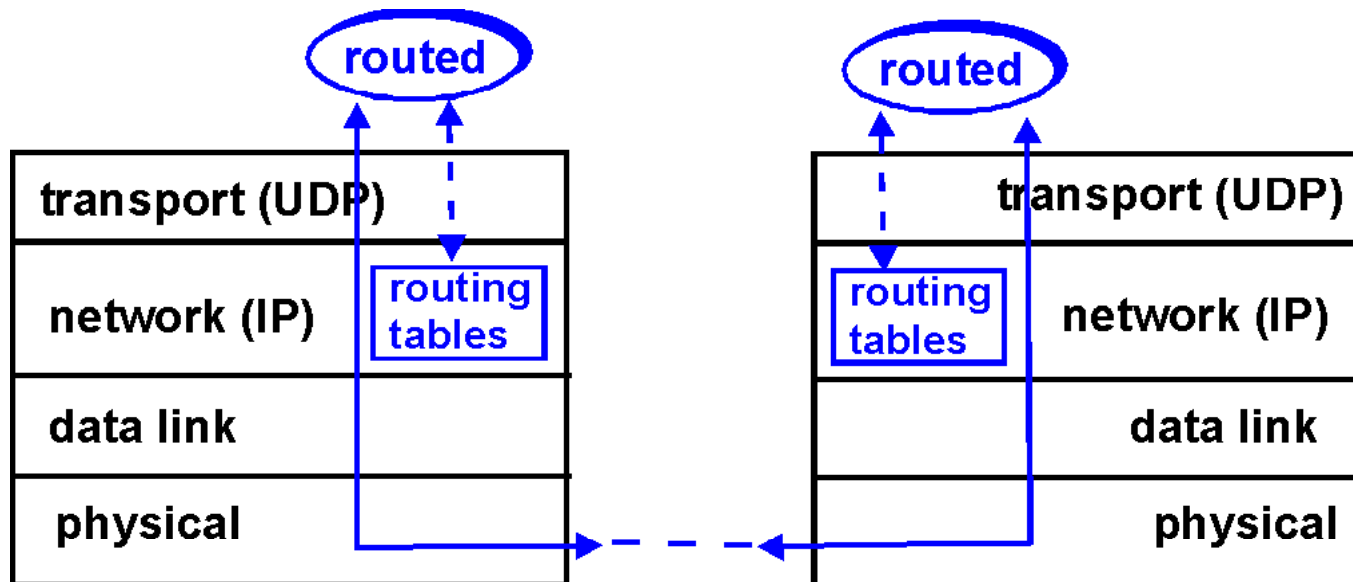


Chapter 4: Network Layer

- ❑ 4.1 Introduction
- ❑ 4.2 Virtual circuit and datagram networks
- ❑ 4.3 What's inside a router
- ❑ 4.4 IP: Internet Protocol
 - Datagram format
 - IPv4 addressing
 - ICMP
 - IPv6
- ❑ 4.5 Routing algorithms
 - Link state
 - Distance Vector
 - Hierarchical routing
- ❑ 4.6 Routing in the Internet
 - RIP
 - OSPF
 - BGP
- ❑ 4.7 Broadcast and multicast routing

OSPF (Open Shortest Path First)

- ❑ “open”: publicly available
- ❑ Uses **Link State** algorithm (configurable edge-costs)
 - Advertisements disseminated to **entire** AS (via flooding), via IP packets (unlike RIP)
- ❑ OSPF “advanced” features (*Note: features of the standardized protocol, not the algorithm*) -not in RIP
 - **Security**: all OSPF messages authenticated (to prevent malicious intrusion)
 - **Multiple** same-cost **paths** allowed (only one path in RIP)
 - multiple cost metrics for different **TypeOfService** (eg, satellite link cost “low” for best effort; high for real time)
 - Integrated uni- and **multicast** support:
 - Multicast OSPF (MOSPF) uses same topology data base as OSPF
 - **Hierarchical** OSPF in large domains.

Hierarchical OSPF

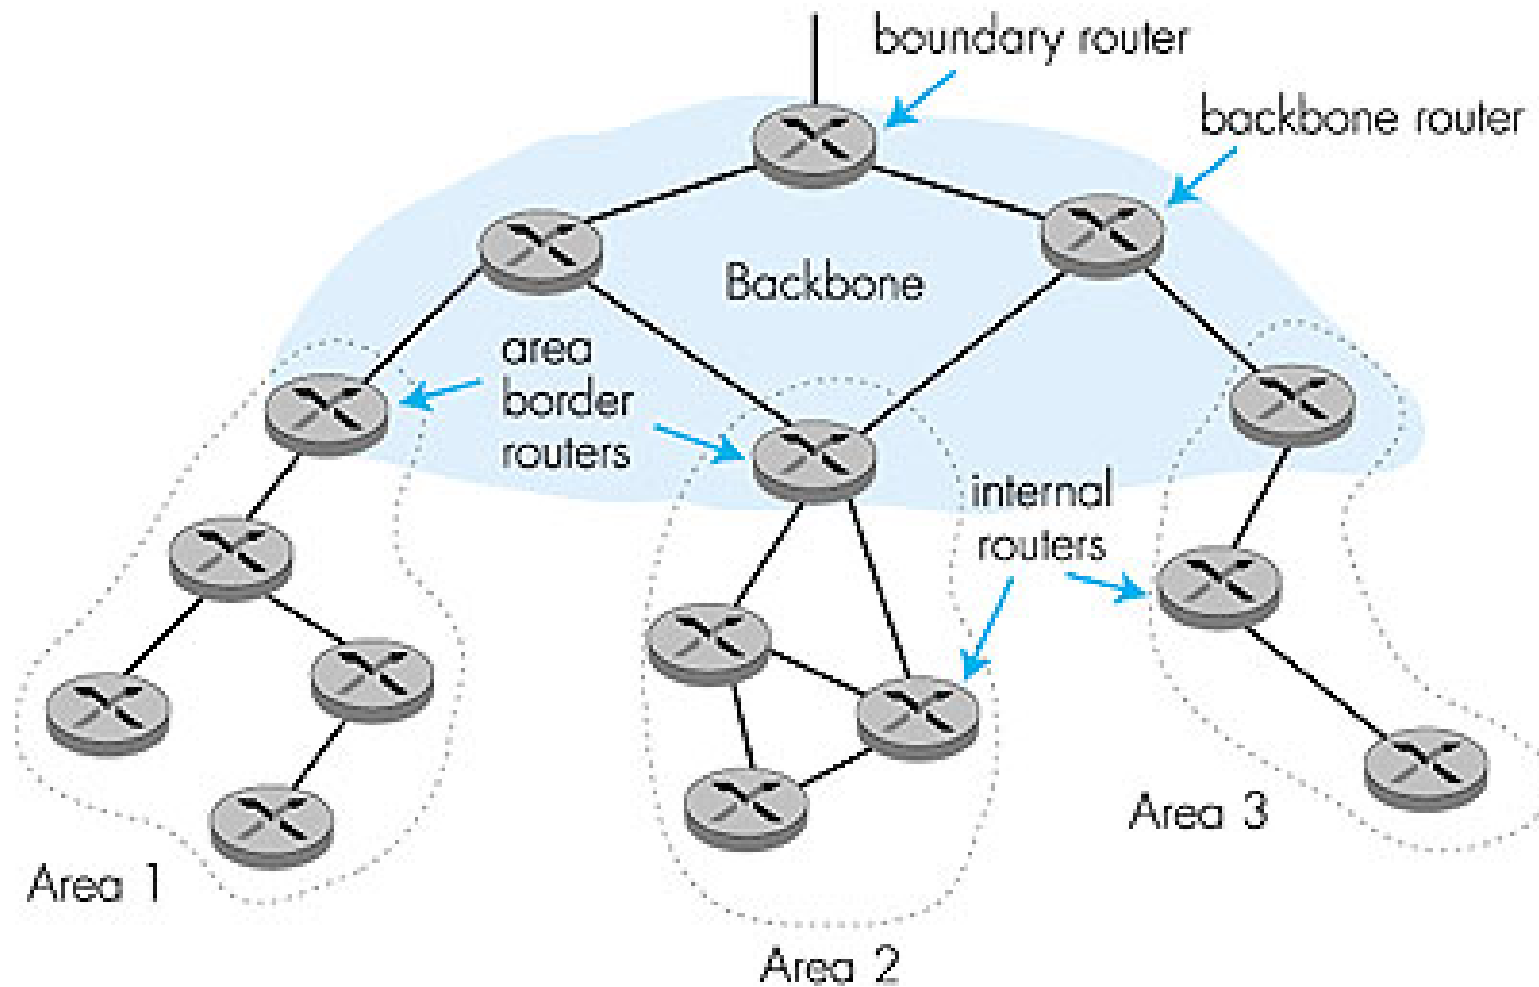

Hierarchical OSPF

- ❑ **Two-level hierarchy:** local area, backbone.
 - Link-state advertisements only in area
 - each node has detailed area topology; only know direction (shortest path) to nets in other areas.
- ❑ **Area border routers:** “summarize” distances to nets in own area, advertise to other Area Border routers.
- ❑ **Backbone routers:** run OSPF routing limited to backbone.
- ❑ **Boundary routers:** connect to other ASs.

Chapter 4: Network Layer


- ❑ 4.1 Introduction
- ❑ 4.2 Virtual circuit and datagram networks
- ❑ 4.3 What's inside a router
- ❑ 4.4 IP: Internet Protocol
 - Datagram format
 - IPv4 addressing
 - ICMP
 - IPv6
- ❑ 4.5 Routing algorithms
 - Link state
 - Distance Vector
 - Hierarchical routing
- ❑ 4.6 Routing in the Internet
 - RIP
 - OSPF
 - BGP
- ❑ 4.7 Broadcast and multicast routing

Internet inter-AS routing: BGP

- ❑ **BGP (Border Gateway Protocol):** *the de facto standard*
- ❑ BGP provides each AS a means to:
 1. Obtain subnet reachability information from neighboring ASs.
 2. Propagate reachability information to all AS-internal routers.
 3. Determine “good” routes to subnets based on reachability information and policy.
- ❑ allows subnet to advertise its existence to rest of Internet: *“I am here”*


BGP basics

- ❑ pairs of routers (BGP peers) exchange routing info over semi-permanent TCP connections: **BGP sessions**
 - External, internal: eBGP, iBGP
 - BGP sessions need not correspond to physical links.
- ❑ when AS2 advertises a prefix (e.g. subnet) to AS1:
 - AS2 **promises** it will forward datagrams towards that prefix.
 - AS2 can aggregate prefixes in its advertisement

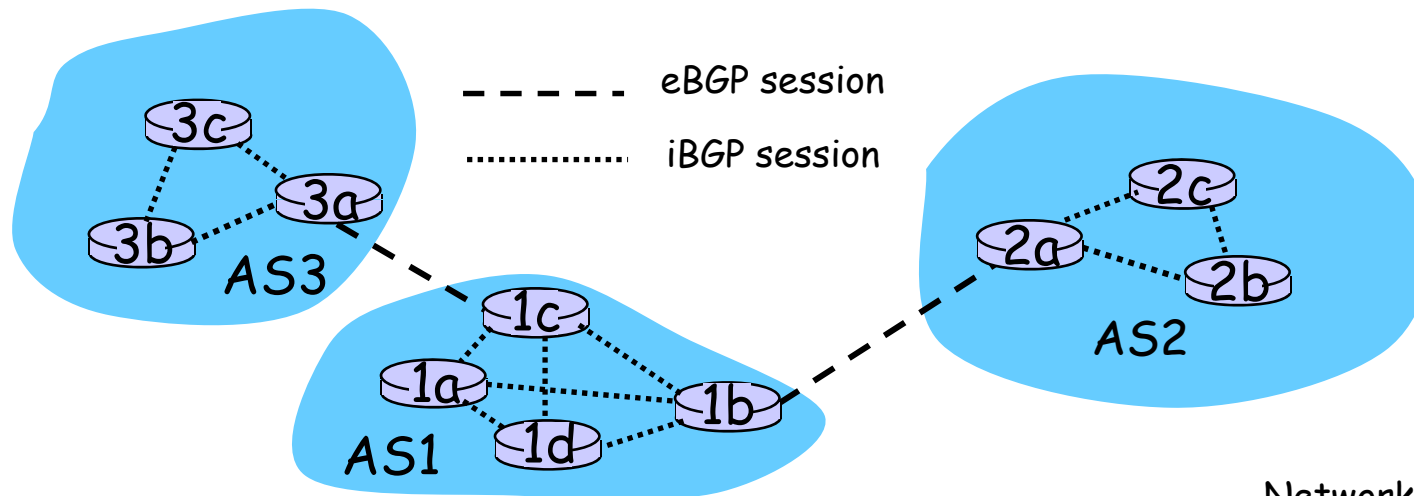

Distributing reachability info

- using eBGP session between 3a and 1c, AS3 sends prefix reachability info to AS1.
 - 1c can then use iBGP to distribute new prefix info to all routers in AS1
 - 1b can then re-advertise new reachability info to AS2 over 1b-to-2a eBGP session
- when router learns of new prefix, it creates entry for prefix in its forwarding table.

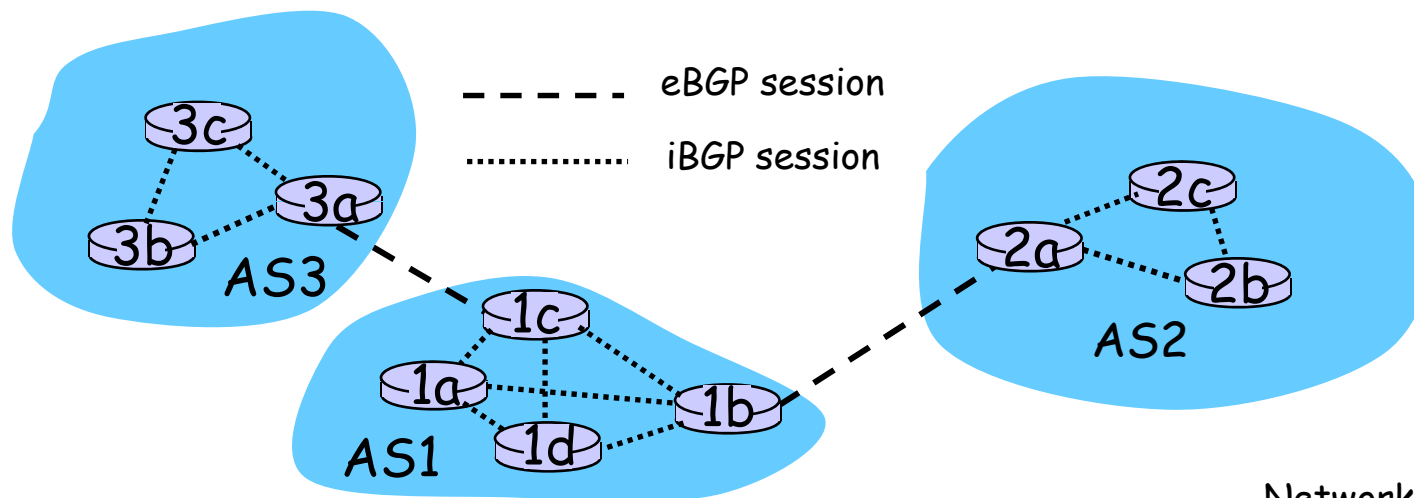

BGP: routing

- **Path Vector** protocol (similar to Distance Vector): each Border Gateway advertises *entire path* (I.e, sequence of ASs) to destination

Suppose: gateway X send its path to peer gateway W

- W may or may not select path offered by X
 - cost, policy (don't route via competitor's AS), loop prevention reasons.
- If W selects path advertised by X, then:
$$\text{Path (W,Z)} = w, \text{Path (X,Z)}$$
- Note: X can control incoming traffic by controlling its route advertisements to peers:
 - e.g., don't want to route traffic to Z -> don't advertise any routes to Z

Path attributes & BGP routes

- ❑ advertised prefix includes BGP attributes.
 - prefix + attributes = "route"
- ❑ two important attributes:
 - **AS-PATH**: contains ASs through which prefix advertisement has passed: e.g, AS 67, AS 17
 - **NEXT-HOP**: indicates specific internal-AS router to next-hop AS. (may be multiple links from current AS to next-hop-AS)
- ❑ when gateway router receives route advertisement, uses **import policy** to accept/decline.


BGP route selection

- ❑ router may learn about more than 1 route to some prefix. Router must select route.
- ❑ elimination rules:
 1. local preference value attribute: policy decision
 2. shortest AS-PATH
 3. closest NEXT-HOP router: hot potato routing
 4. additional criteria

BGP messages


- ❑ BGP messages exchanged using TCP.
- ❑ BGP messages:
 - **OPEN**: opens TCP connection to peer and authenticates sender
 - **UPDATE**: advertises new path (or withdraws old)
 - **KEEPALIVE** keeps connection alive in absence of UPDATES; also ACKs OPEN request
 - **NOTIFICATION**: reports errors in previous msg; also used to close connection

BGP routing policy: example

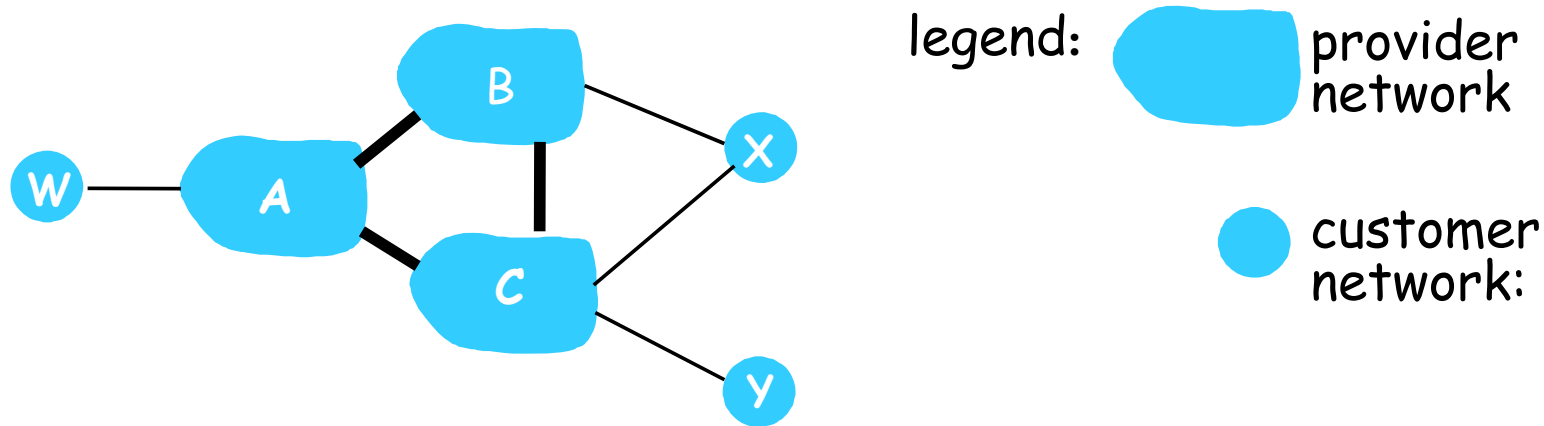

- A,B,C are **provider networks**
- X,W,Y are customer (of provider networks)
- X is **dual-homed**: attached to two networks
 - X does not want to route from B via X to C
 - .. so X will not advertise to B a route to C

BGP routing policy: example (cont)

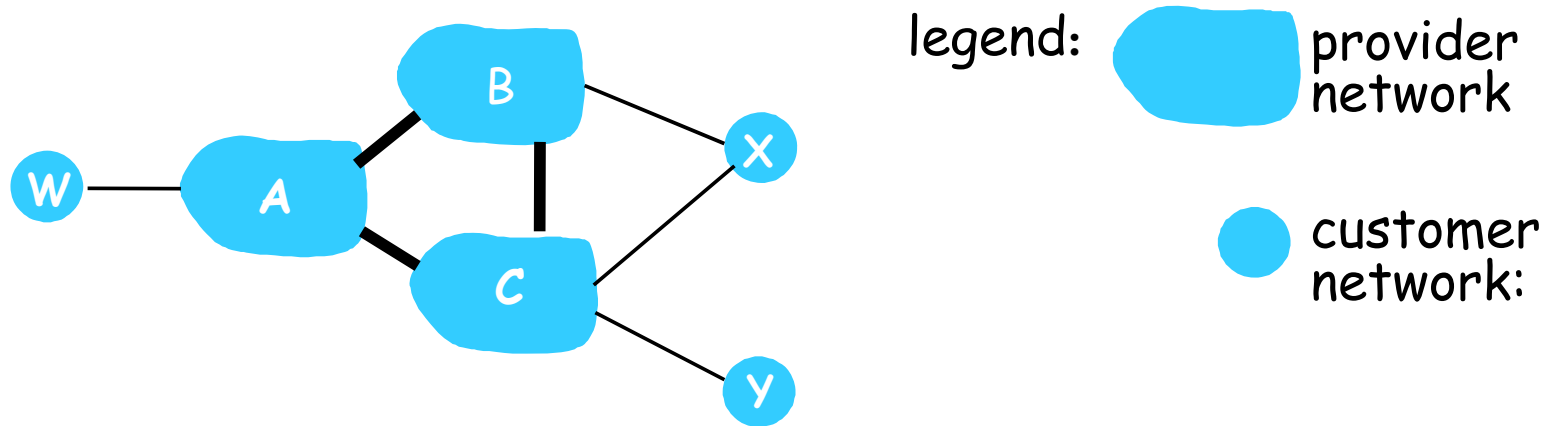

- ❑ A advertises path *AW* to B
- ❑ B advertises path *BAW* to X
- ❑ Should B advertise path *BAW* to C?
 - No way! B gets no "revenue" for routing *CBAW* since neither *W* nor *C* are B's customers
 - B wants to force *C* to route to *w* via *A*
 - B wants to route *only* to/from its customers!

Why different Intra- and Inter-AS routing ?

Policy:

- ❑ Inter-AS: admin wants control over how its traffic routed, who routes through its net.
- ❑ Intra-AS: single admin, so no policy decisions needed

Scale:

- ❑ hierarchical routing saves table size, reduced update traffic

Performance:

- ❑ Intra-AS: can focus on performance
- ❑ Inter-AS: policy may dominate over performance

Chapter 4: Network Layer

- ❑ 4.1 Introduction
- ❑ 4.2 Virtual circuit and datagram networks
- ❑ 4.3 What's inside a router
- ❑ 4.4 IP: Internet Protocol
 - Datagram format
 - IPv4 addressing
 - ICMP
 - IPv6
- ❑ 4.5 Routing algorithms
 - Link state
 - Distance Vector
 - Hierarchical routing
- ❑ 4.6 Routing in the Internet
 - RIP
 - OSPF
 - BGP
- ❑ 4.7 Broadcast and multicast routing (next)