

Operating Systems and Networks


Tomas Olovsson
Computer Science & Engineering

Roadmap

- Operating Systems
 - What is an Operating System
 - OS evolution
 - OS details
- Networking
 - The Internet
 - Network protocols
 - Security

How do I run a program?

```
{  
  var mode = String (orient);  
  var p = subMenu.offsetParent;  
  var subMenuWidth = cmGetWidth (subMenu);  
  var horiz = cmGetHorizontalAlign (obj, mode, p, subMenuWidth);  
  if (mode.charAt (0) == 'h')  
  {  
    if (mode.charAt (1) == 'b')  
      subMenu.style.top = (cmGetYAt (obj, p) + cmGetHeight (obj, p));  
    else  
      subMenu.style.top = (cmGetYAt (obj, p) - cmGetHeight (obj, p));  
    if (horiz == 'r')  
      subMenu.style.left = (cmGetXAt (obj, p) + 'px');  
    else  
      subMenu.style.left = (cmGetXAt (obj, p) + cmGetWidth (obj, p));  
  }  
  else  
  {  
    if (horiz == 'r')  
      subMenu.style.left = (cmGetXAt (obj, p) + cmGetWidth (obj, p));  
    else  
      subMenu.style.left = (cmGetXAt (obj, p) - subMenuWidth);  
    if (mode.charAt (1) == 'b')  
      subMenu.style.top = (cmGetYAt (obj, p)) + 'px';  
    else  
      subMenu.style.top = (cmGetYAt (obj, p) + cmGetHeight (obj, p));  
  }  
}
```

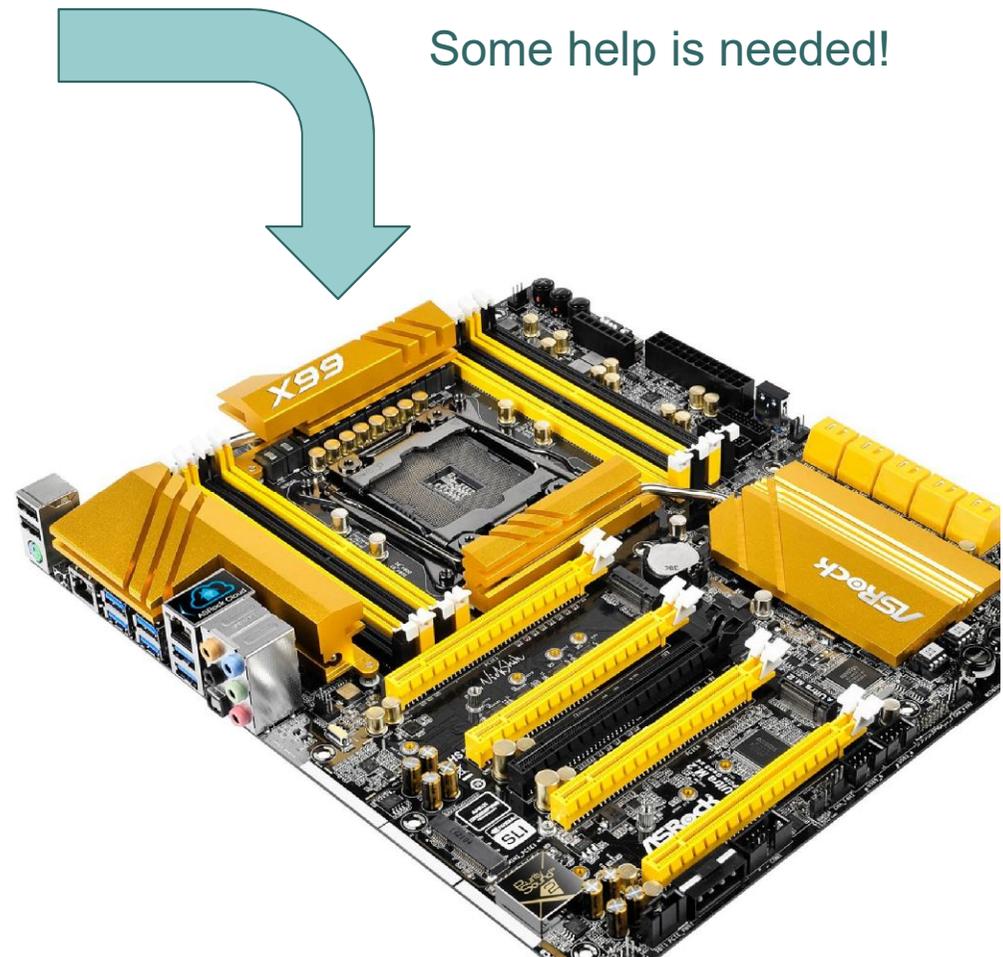

How do I run a program?


```
00000000  
00000001  
00000003  
00000007  
00000008  
0000000C  
0000000F  
00000011  
00000014  
00000016  
00000019  
0000001B  
0000001D  
0000001F  
00000022  
00000025
```

```
push    ebp  
mov     ebp, esp  
movzx  ecx, [ebp+arg_0]  
pop     ebp  
movzx  dx, cl  
lea    eax, [edx+edx]  
add    eax, edx  
shl   eax, 2  
add    eax, edx  
shr   eax, 8  
sub   cl, al  
shr   cl, 1  
add   al, cl  
shr   al, 5  
movzx eax, al  
retn
```

Operating system



```
{  
  var mode = String (orient);  
  var p = subMenu.offsetParent;  
  var subMenuWidth = cmGetWidth (subMenu);  
  var horiz = cmGetHorizontalAlign (obj, mode, p, subMenuWidth);  
  if (mode.charAt (0) == 'h')  
  {  
    if (mode.charAt (1) == 'b')  
      subMenu.style.top = (cmGetYAt (obj, p) + cmGetHeight (obj, p));  
    else  
      subMenu.style.top = (cmGetYAt (obj, p) - cmGetHeight (obj, p));  
    if (horiz == 'r')  
      subMenu.style.left = (cmGetXAt (obj, p)) + 'px';  
    else  
      subMenu.style.left = (cmGetXAt (obj, p) + cmGetWidth (obj, p));  
  }  
  else  
  {  
    if (horiz == 'r')  
      subMenu.style.left = (cmGetXAt (obj, p) + cmGetWidth (obj, p));  
    else  
      subMenu.style.left = (cmGetXAt (obj, p) - subMenuWidth);  
    if (mode.charAt (1) == 'b')  
      subMenu.style.top = (cmGetYAt (obj, p)) + 'px';  
    else  
      subMenu.style.top = (cmGetYAt (obj, p) + cmGetHeight (obj, p));  
  }  
}
```

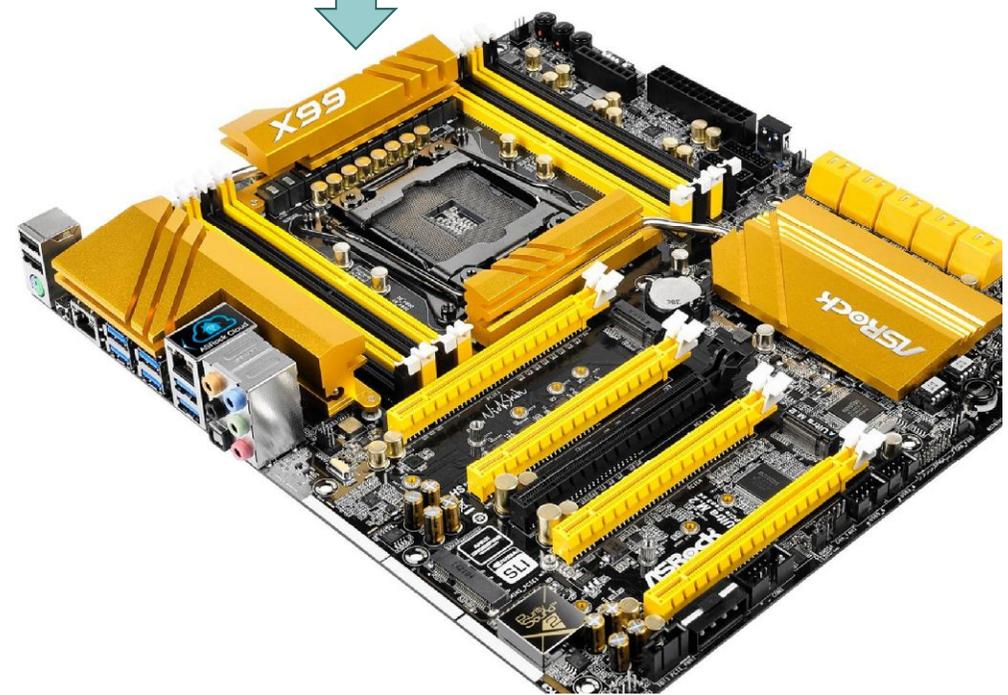


What is an Operating System?


- Intermediary between the user and the hardware
- Controls the execution of application programs
- Is an interface between applications and hardware

- Operating system goals:
 - Execute user programs
 - Make the computer system convenient to use
 - Use the computer hardware in an efficient and device-independent manner


The Computer: End-user's view

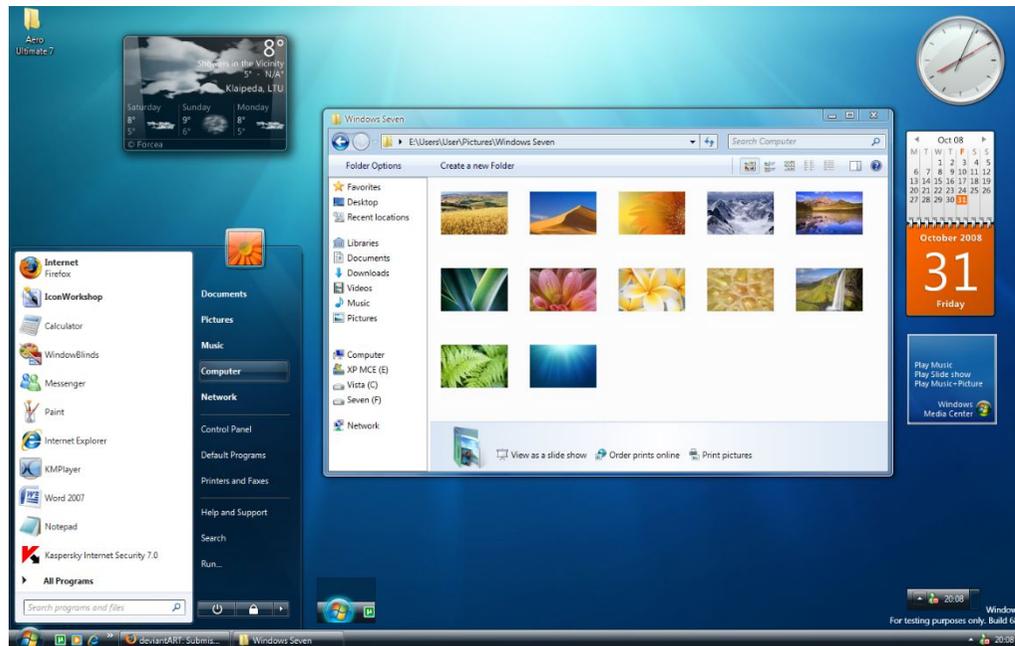

The Computer: Application programmer's view

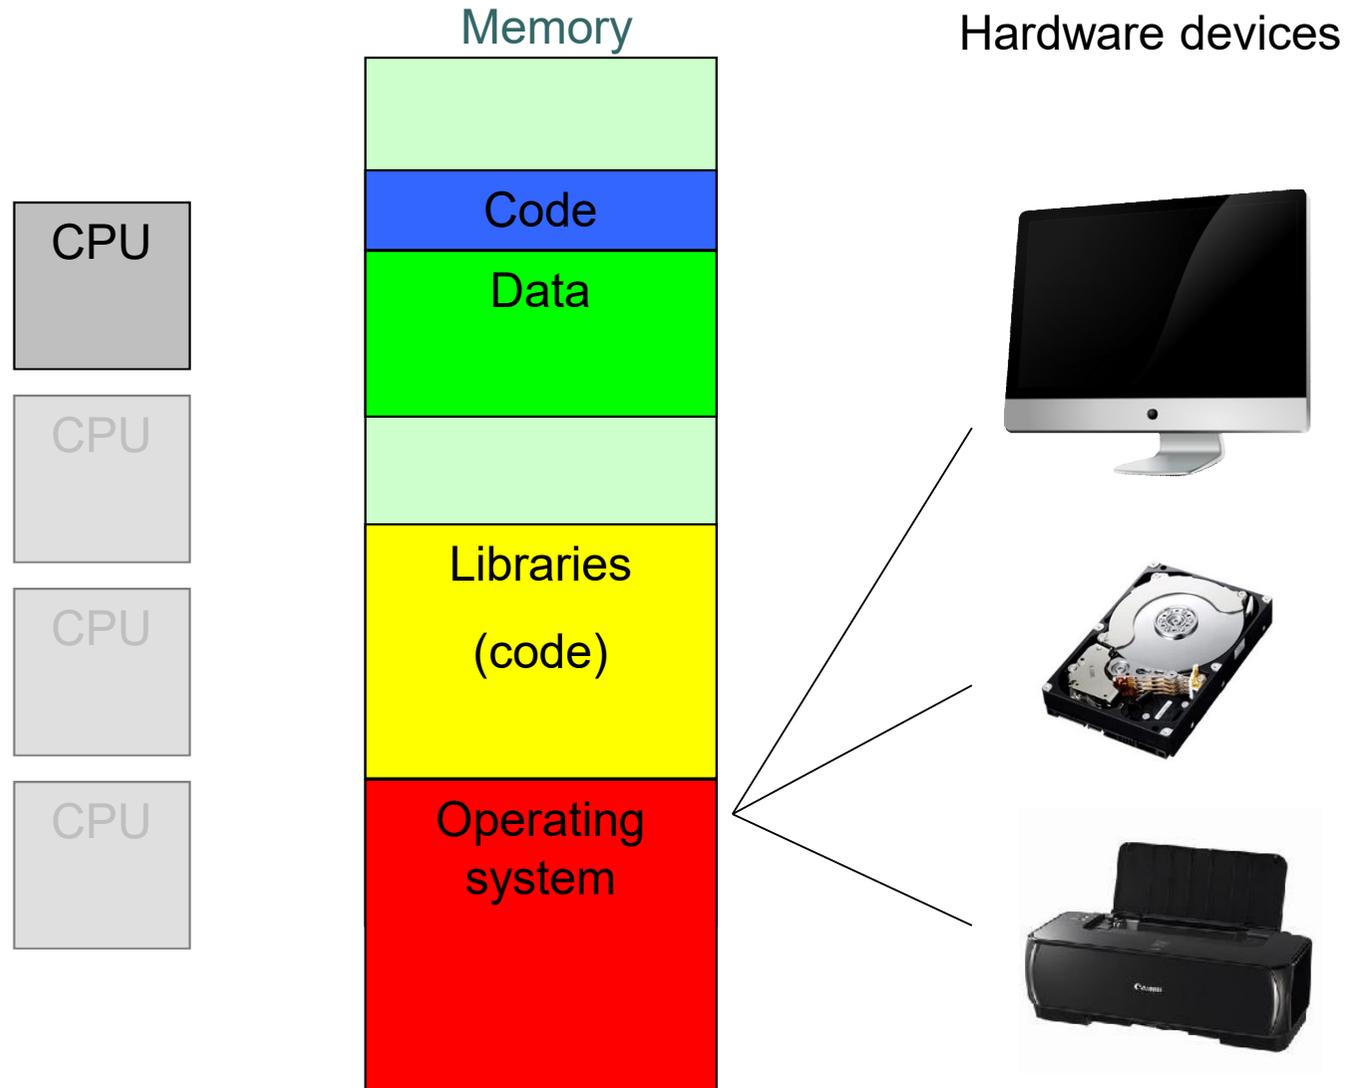


The Computer: OS programmer's view

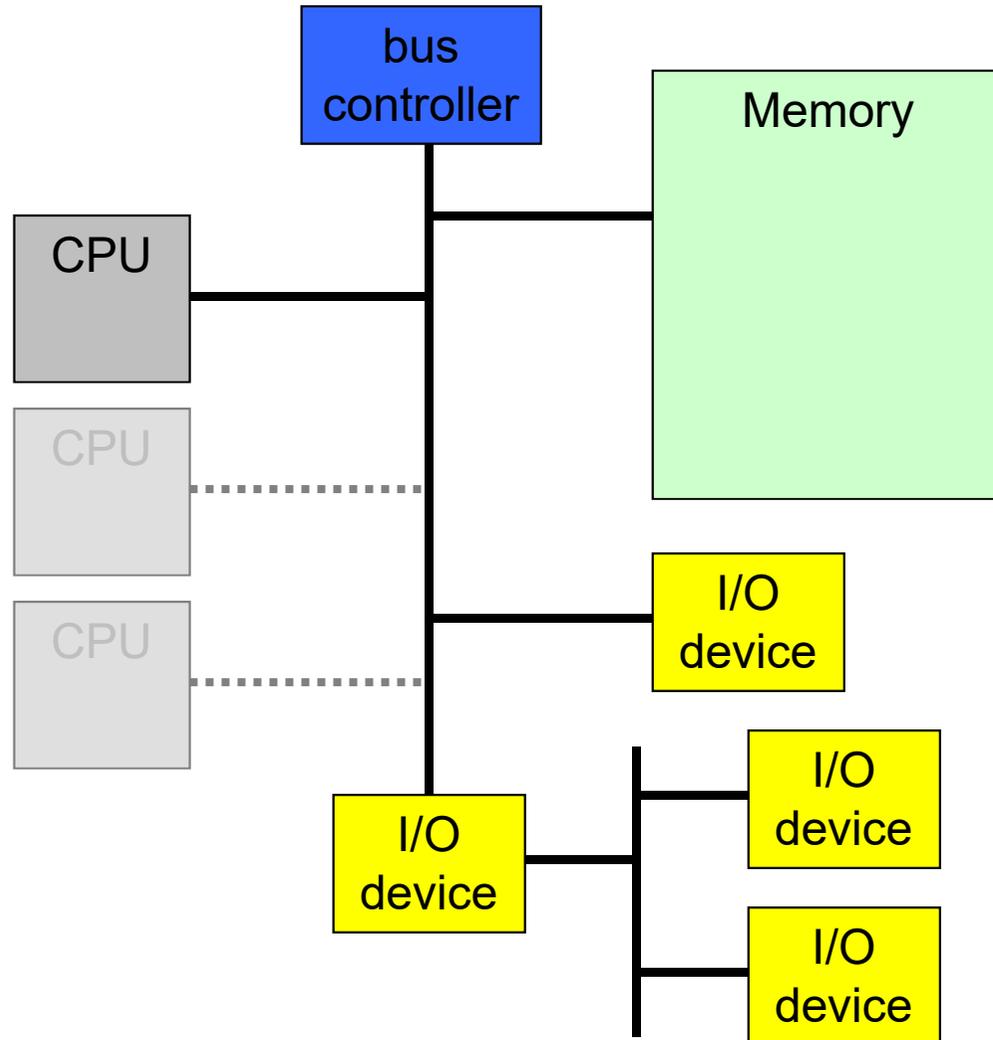

Computer Hardware

- Processors
- Main Memory (RAM)
 - Volatile
- I/O devices
 - secondary memory devices
 - displays, keyboards, ..., communications devices
- System bus
 - communication among processors, memory, and I/O modules

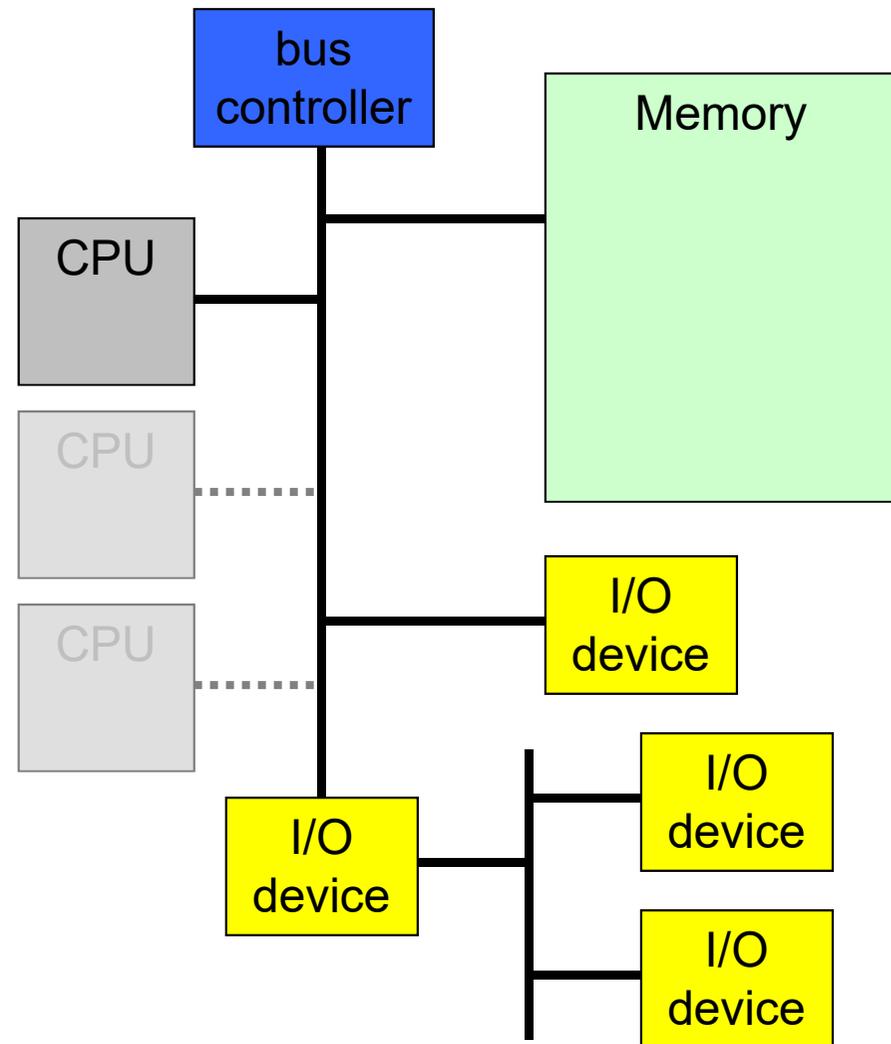


Introduction

- **Operating Systems**
 - What is an Operating System
 - OS evolution
 - OS details
- **Networking**
 - The Internet
 - Network protocols
 - Security


The evolution of operating systems

- The beginning
 - No OS
 - Every application had to do everything by itself
 - One program at a time
 - Help from a program loader only
- Still not so today?
 - Embedded systems and microcontrollers!

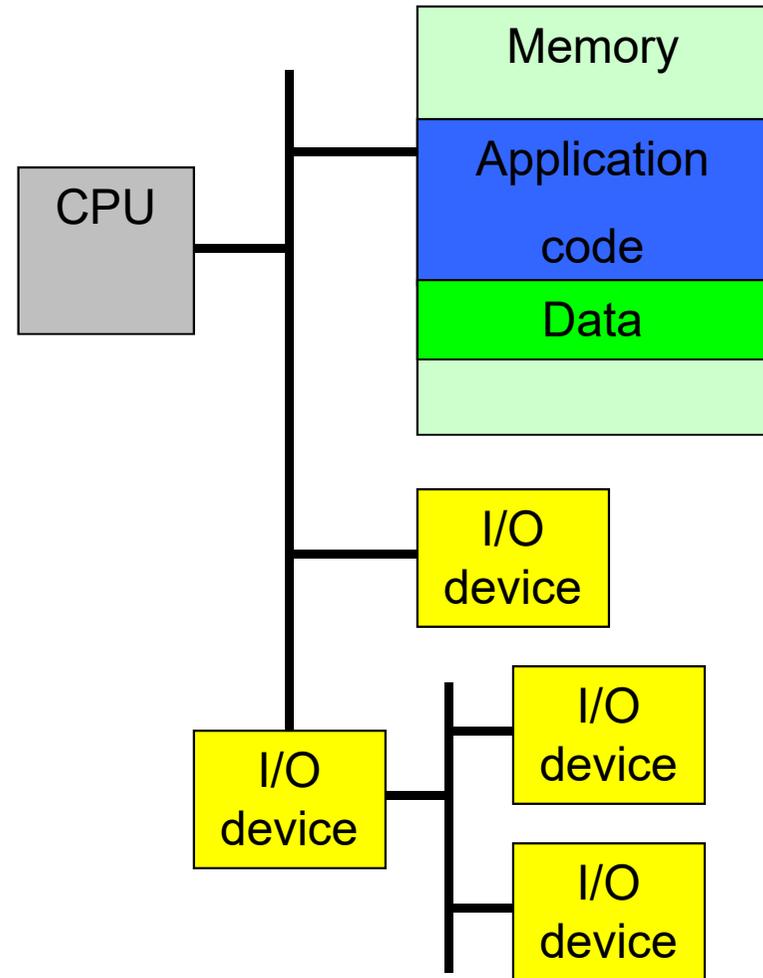



The evolution of operating systems

- BIOS
 - Basic Input Output System
 - In Read Only Memory (ROM)
 - Provides interface routines for accessing the hardware
 - Can load one program
- Still, only one program at a time

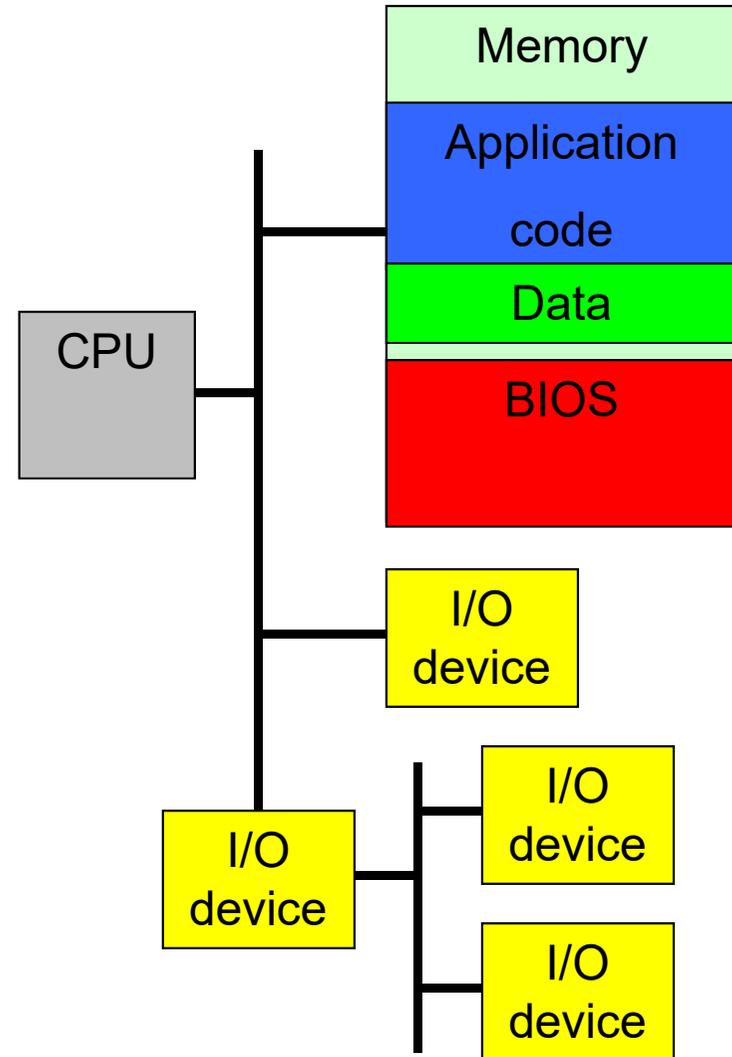

Batch processing

- In the 50s computers were expensive and rare, so efficient utilization was important
- Simple Batch Systems
 - Queue of jobs, run one at the time
 - Monitor
 - Software that controls the running programs
 - Batch jobs together
 - Program branches back to monitor when finished
 - Resident monitor is in main memory and available for execution

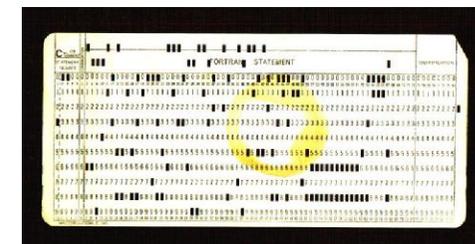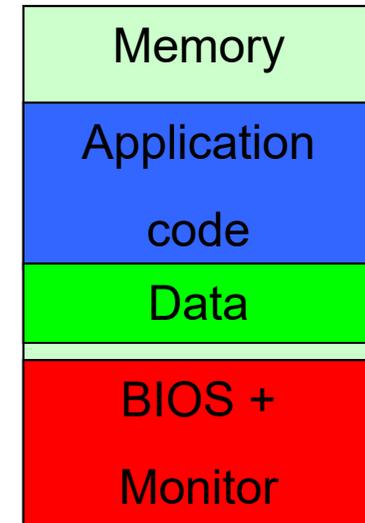


Single program execution

- One single program is running
- Processor must wait for I/O operations to complete before proceeding
- Leads to poor processor utilization



Concurrent program execution (1)

Context (or task) switching

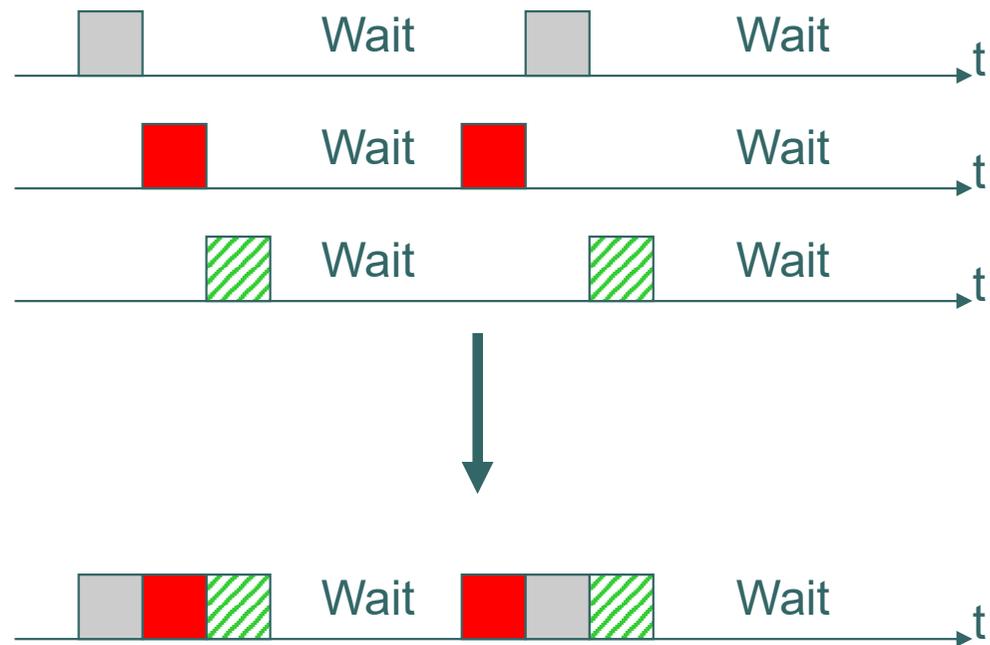


Concurrent program execution (2)

Context (or task) switching

- (Seemingly) concurrent execution
 - Switch jobs at regular intervals
 - Benefits
 - Many applications running at the same time
 - Allows many simultaneous users
 - Interactive programs
 - “Real-time” interaction with user
 - Parallel/concurrent applications
 - Next step
 - Multiprocessor computers


Concurrent execution – The challenge

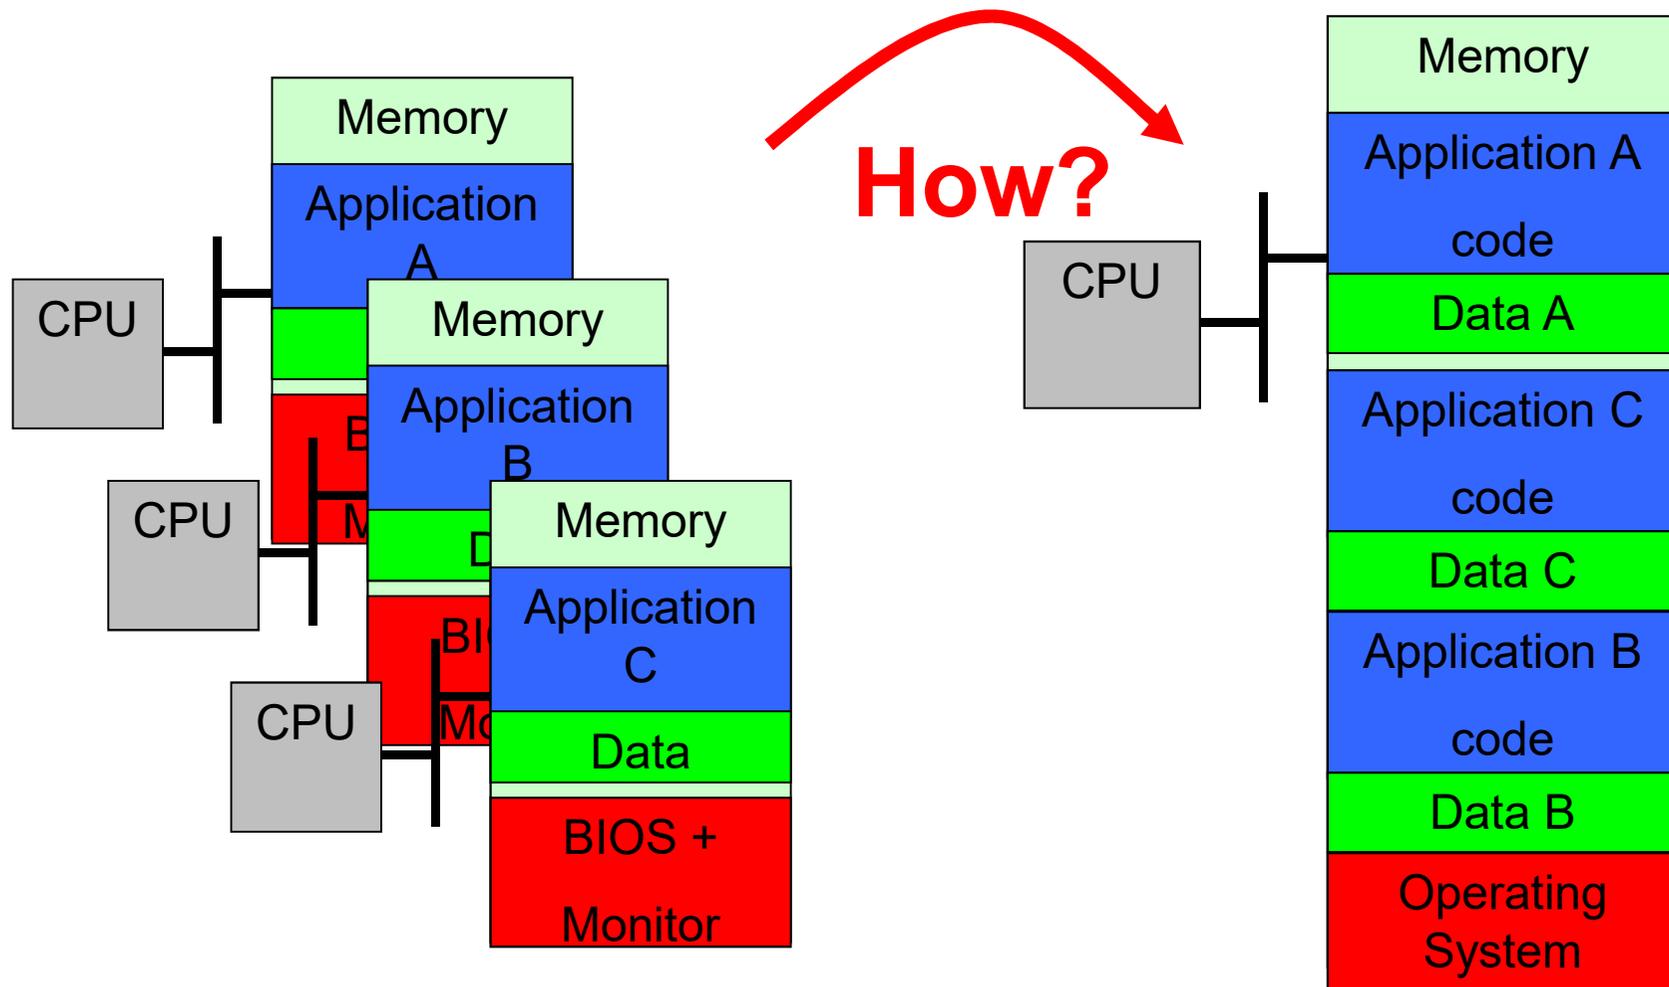

System Architecture


Software in the system:

- Applications
- System software
 - Operating System
 - Shell
 - GUI
 - Command line
 - Kernel
 - The core of the OS
 - Utilities
 - Compilers
 - Interpreters

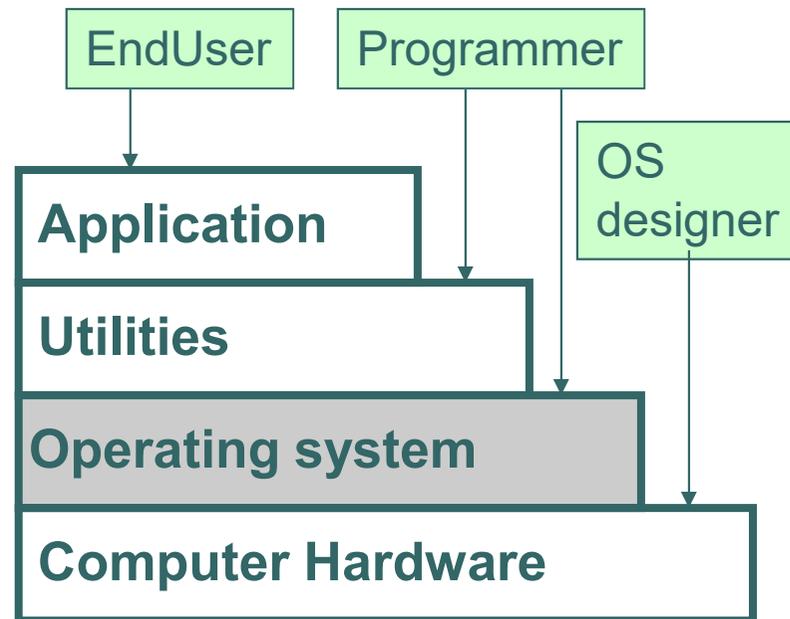

Services provided by the OS

- Program execution
- Shared access to I/O devices
- Controlled access to files
- Error detection
 - Hardware errors
 - Software errors

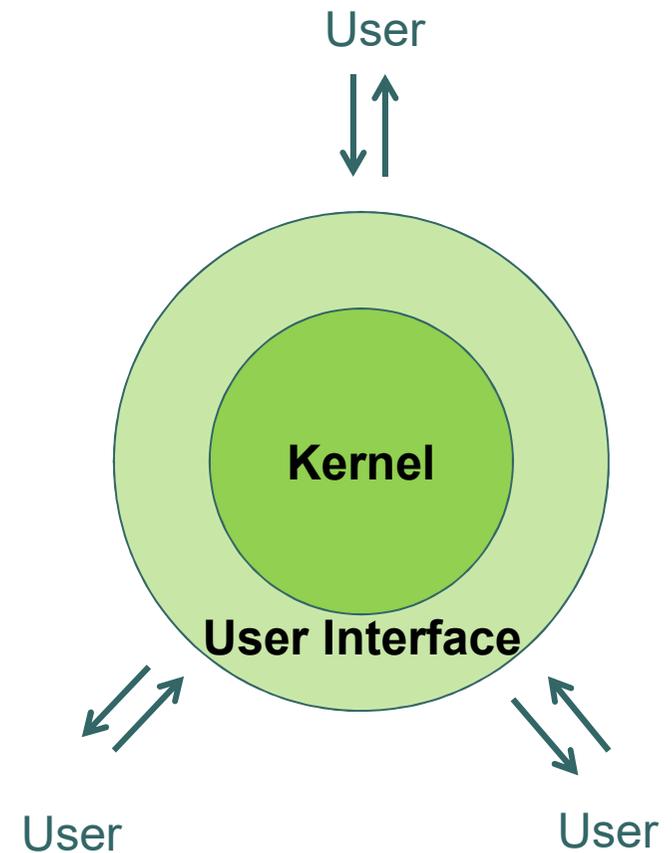


Kernel overview

- Resource control
 - CPU Scheduling
 - Memory manager
 - File manager
 - Device drivers
- BIOS still present at startup
 - Bootstrap
 - Get the operating system running at power on



Kernel Security

- Privileged mode (Kernel mode)
 - Allowed to execute all CPU instructions
 - Access to all I/O devices
- Unprivileged mode (User mode)
 - Not all CPU instructions can be executed
 - e.g. access to memory and I/O devices are restricted

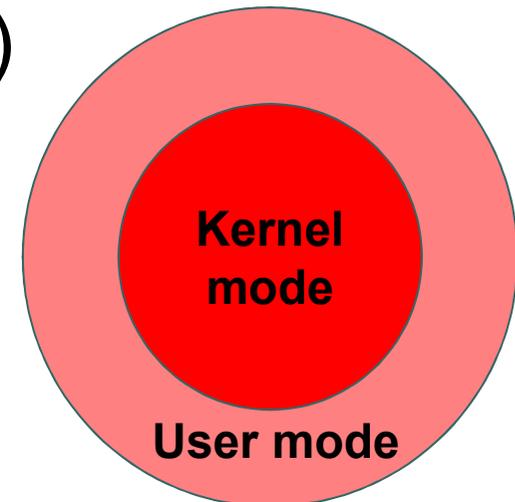

Roadmap

- **Operating Systems**
 - What is an Operating System
 - OS evolution
 - OS details
 - Context Switching
 - Virtual Memory
 - Resource Competition and Deadlock
 - File Systems
 - Interprocess Communication
- Networking

The answer to concurrent execution: Processes


P1: MS Word

P2: Chrome


P3: ...

- Process
 - A program in execution
 - The OS presents a simpler "virtual" computer for exclusive use by the program
 - A process includes:
 - Program code
 - Program data and stack
 - The variables
 - State
 - for context switches
- } Snapshot of the state of the program in execution


Sharing the processor

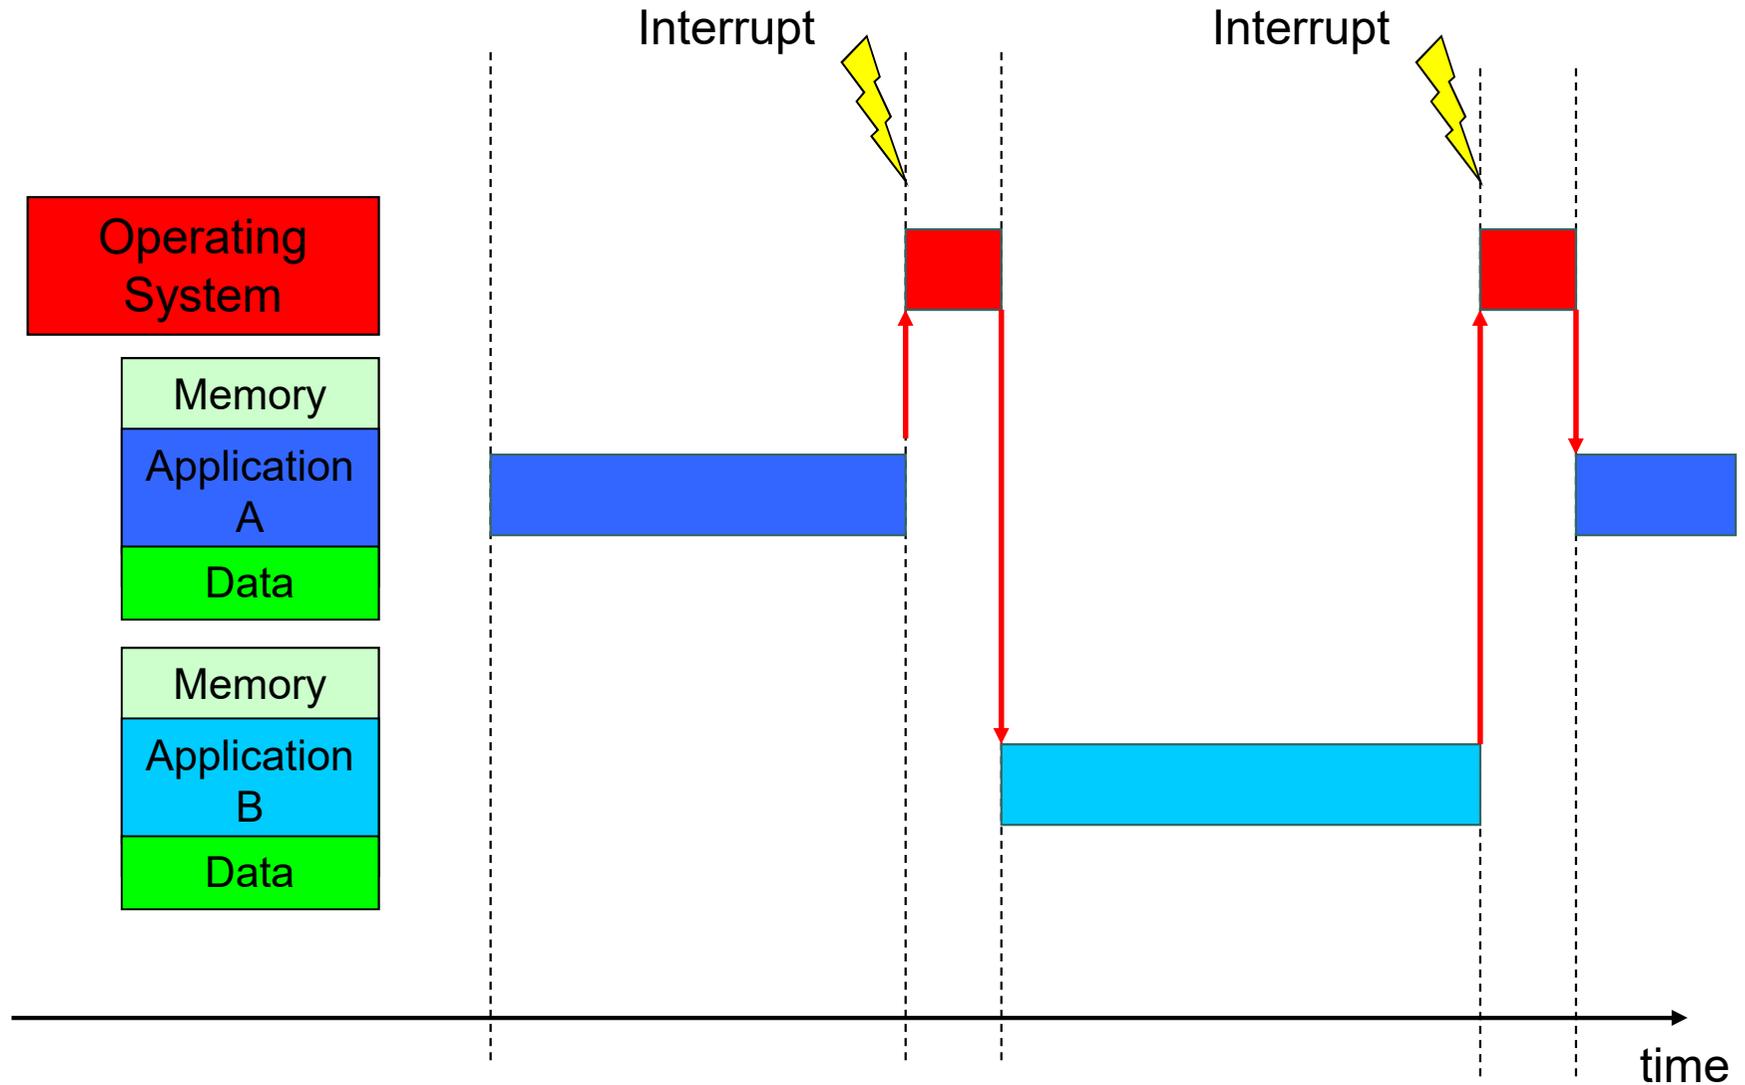

Sharing the processor

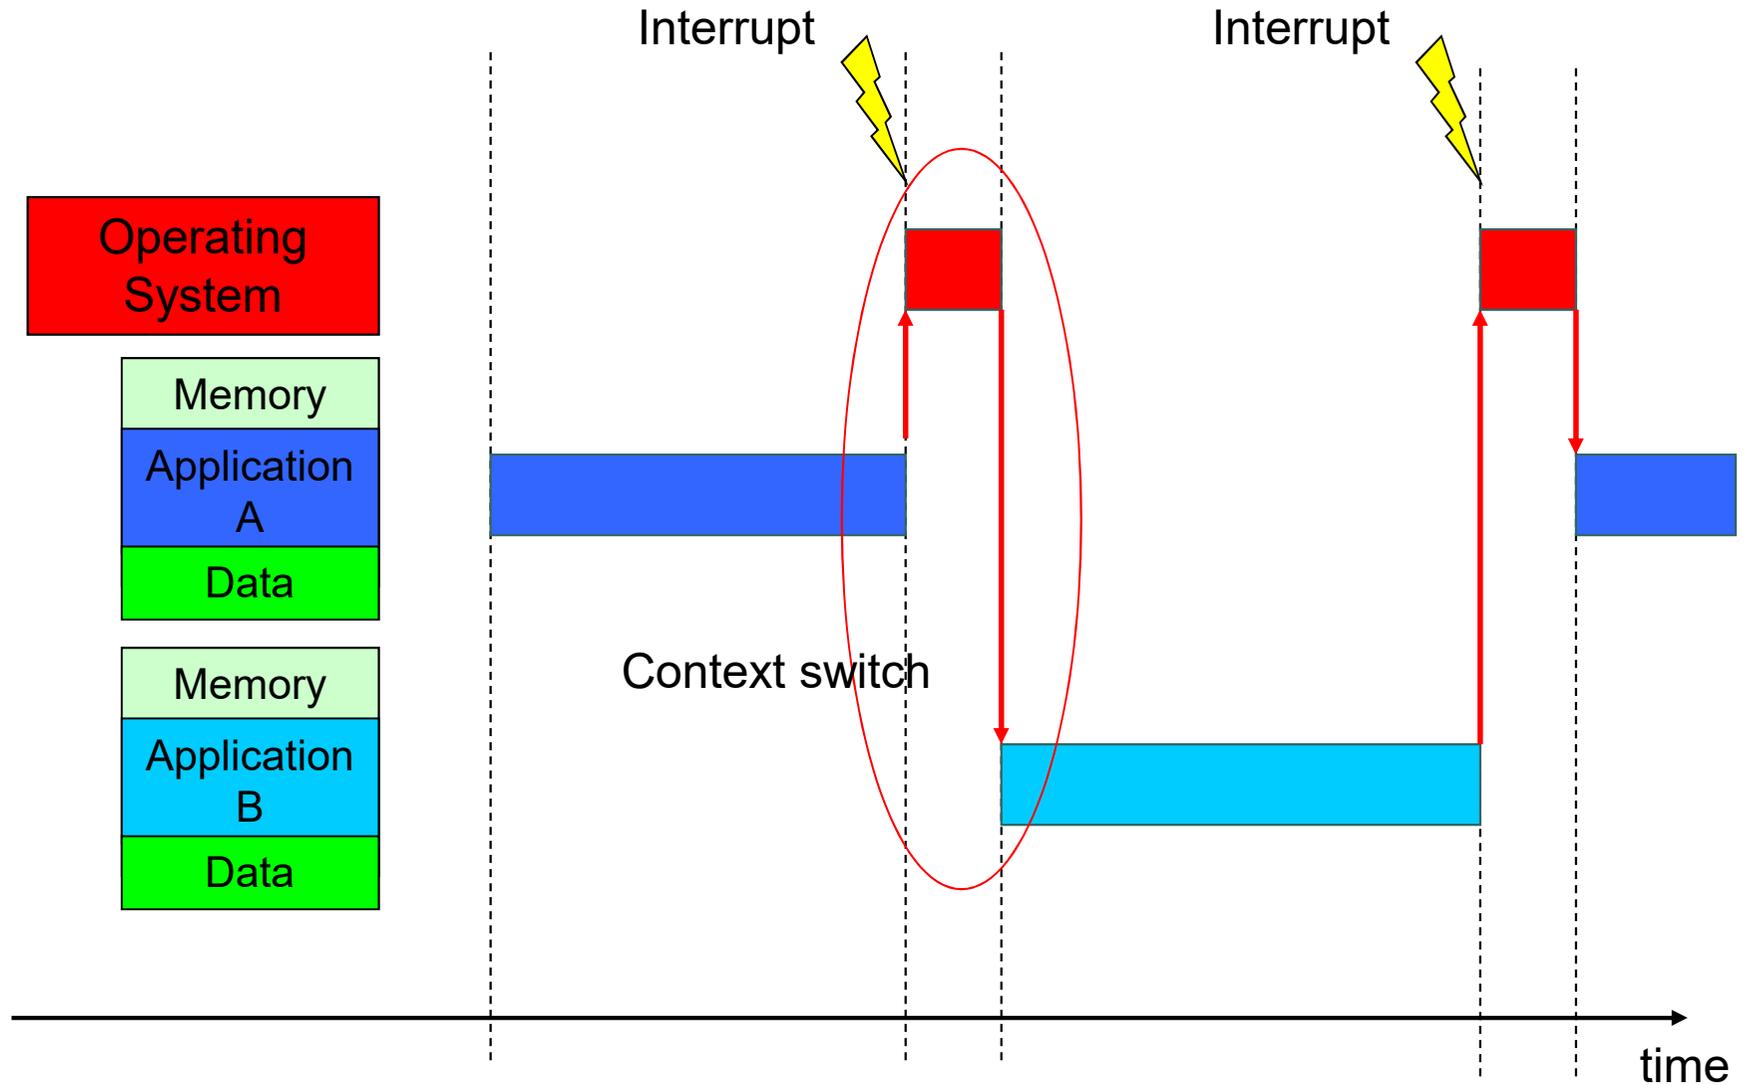

Sharing the processor

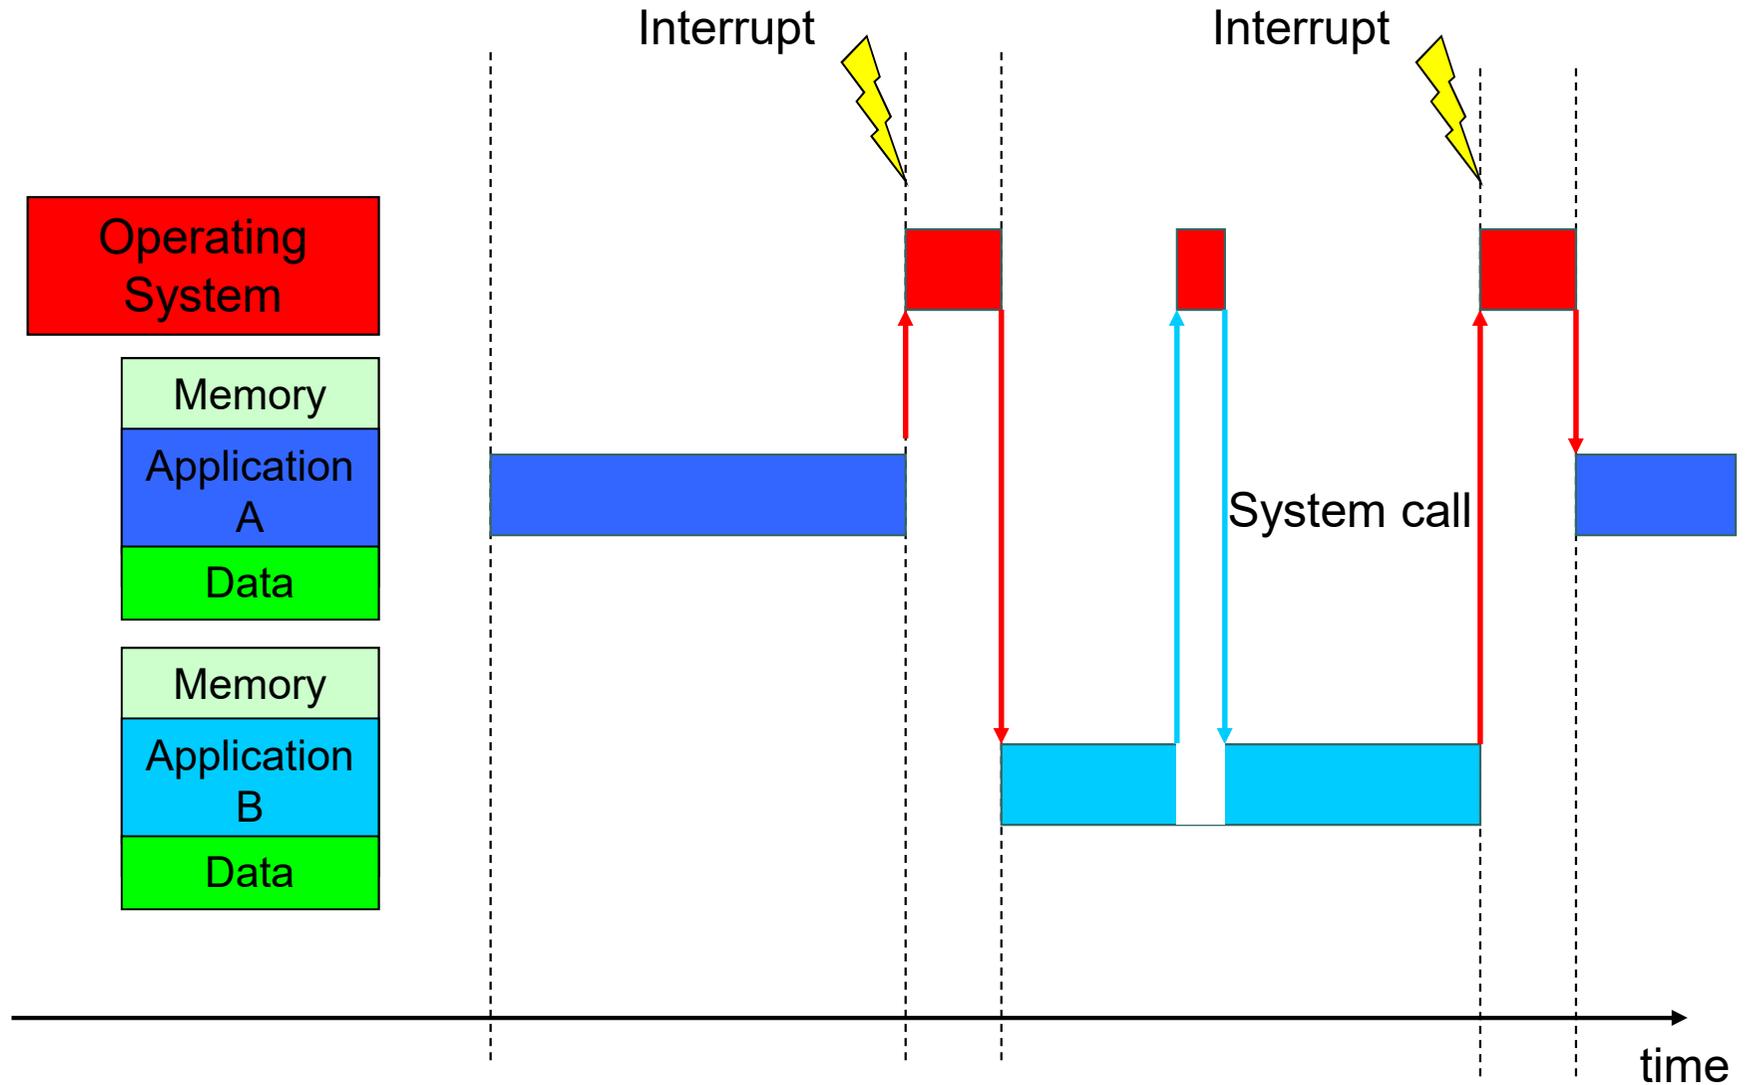

Context switch

Switching Process


- When switching to another process
 - Save state of old process
 - Load state of new process
- Reasons for switch
 - Interrupts
 - Blocking operations
 - I/O
 - Process synchronization
- Scheduling
 - Choosing the next process to switch to

Virtual Memory

- The illusion of having almost unlimited memory
 - And all the memory for itself
 - 64-bit address => 16.8 million TB
- Main memory shared and smaller
 - OS moves parts of processes to secondary memory
- Protects each process' memory from other processes


Paging

- Address space and main (physical) memory is divided into fixed-sized pages
- Each page may be located anywhere in main memory
- Or on hard disk if not currently needed

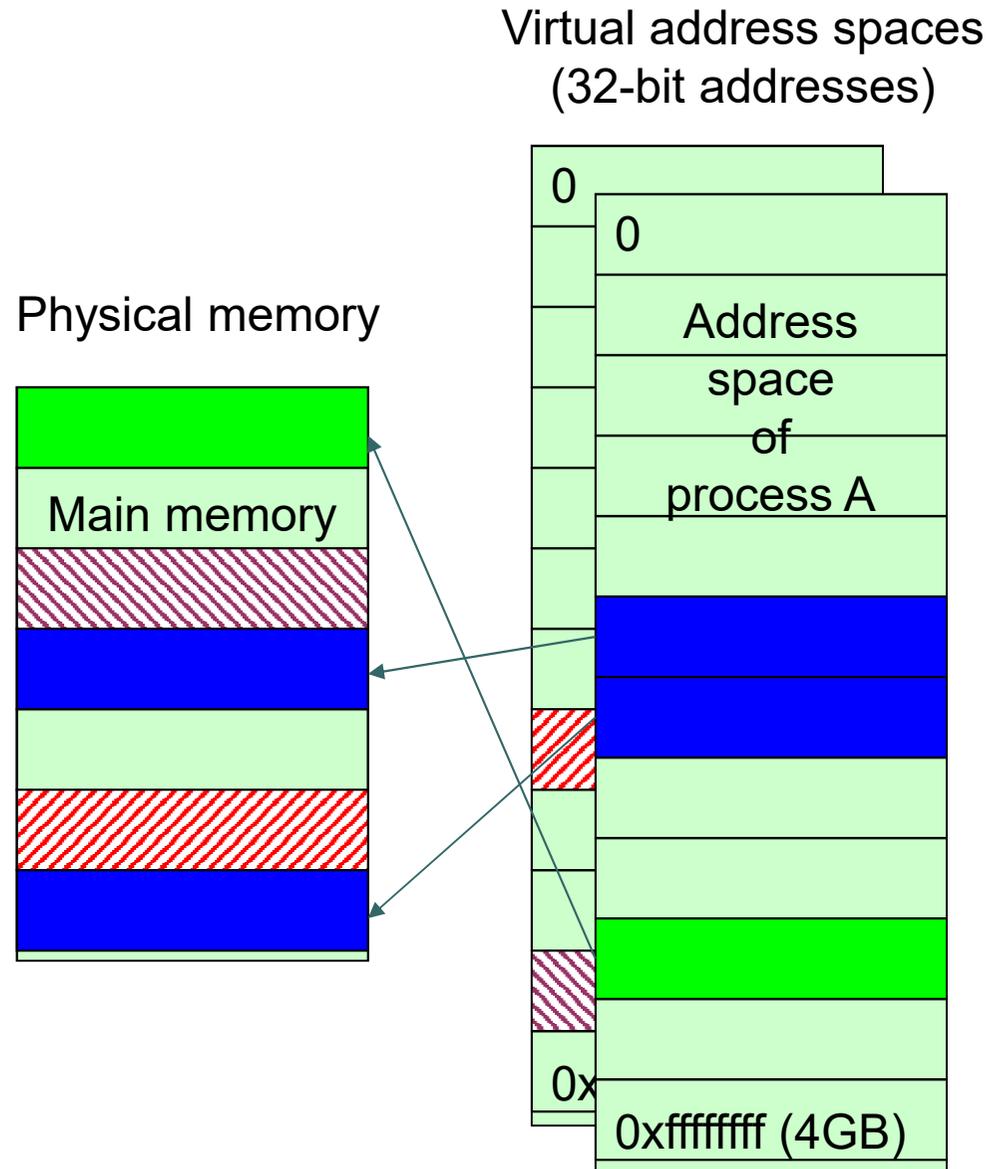

Virtual memory addressing

- A virtual address is the combination of
 - A page number
 - An offset within the page

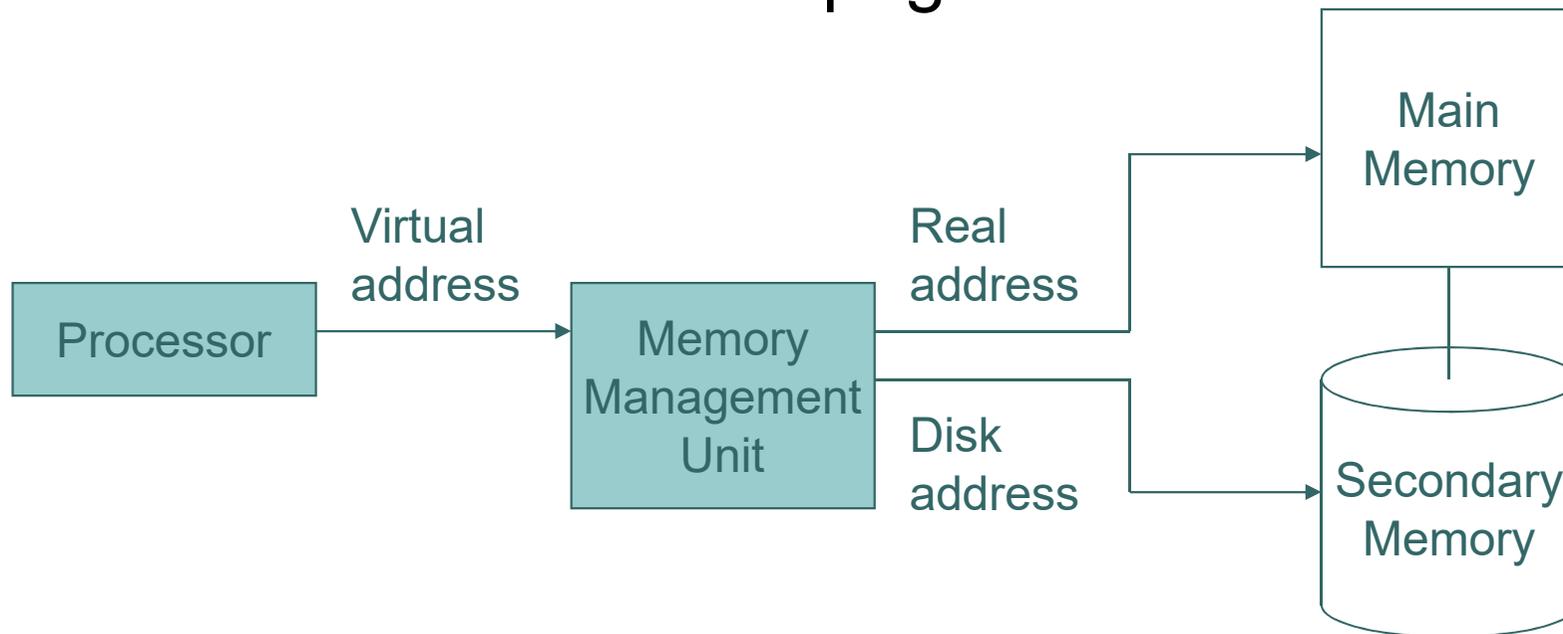


When physically memory filled

- Pages can be written to disk
 - They are "paged out"
 - Memory becomes available for other pages
 - Chosen pages should be seldomly used
 - If a process uses paged out memory
 - Needs to be read back into main memory
 - Probably ends up in another physical location

File systems

- An abstraction that provides
 - Long-term information storage in named files and directories
 - Allows hierarchical organization of data
 - Standard interface for applications
- The implementation is layered
 - OS file manager and application interface
 - File system implementation
 - Device driver
 - Storage device

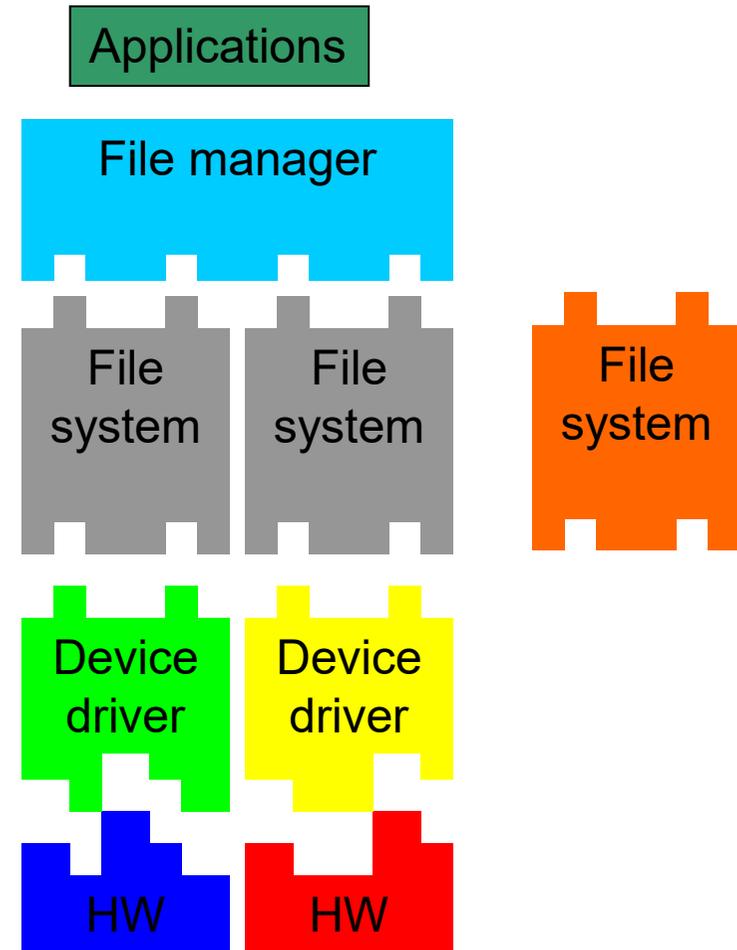


Interprocess Communication

- OS supports communication between processes
- Message-passing (Client/Server model)
 - Clean interface
 - Allows distribution
- Shared memory / shared data structures
 - Locks / Mutual exclusion
 - Acquire / Release
 - Only one process can own it at a time

Roadmap

- Operating Systems
 - What is an Operating System
 - OS evolution
 - OS details
- **Networking**
 - [The Internet](#)
 - Network protocols
 - Security

Networking

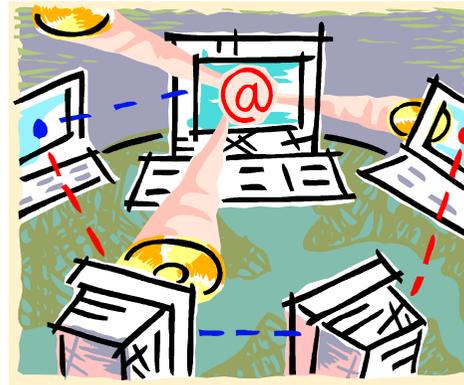


- Purpose

- Allow applications (on different computers) to talk to each other

Networks - A bottom up view


- The Link Layer - Computer to computer communication
 - Point-to-point
 - Shared medium (e.g. Ethernet)

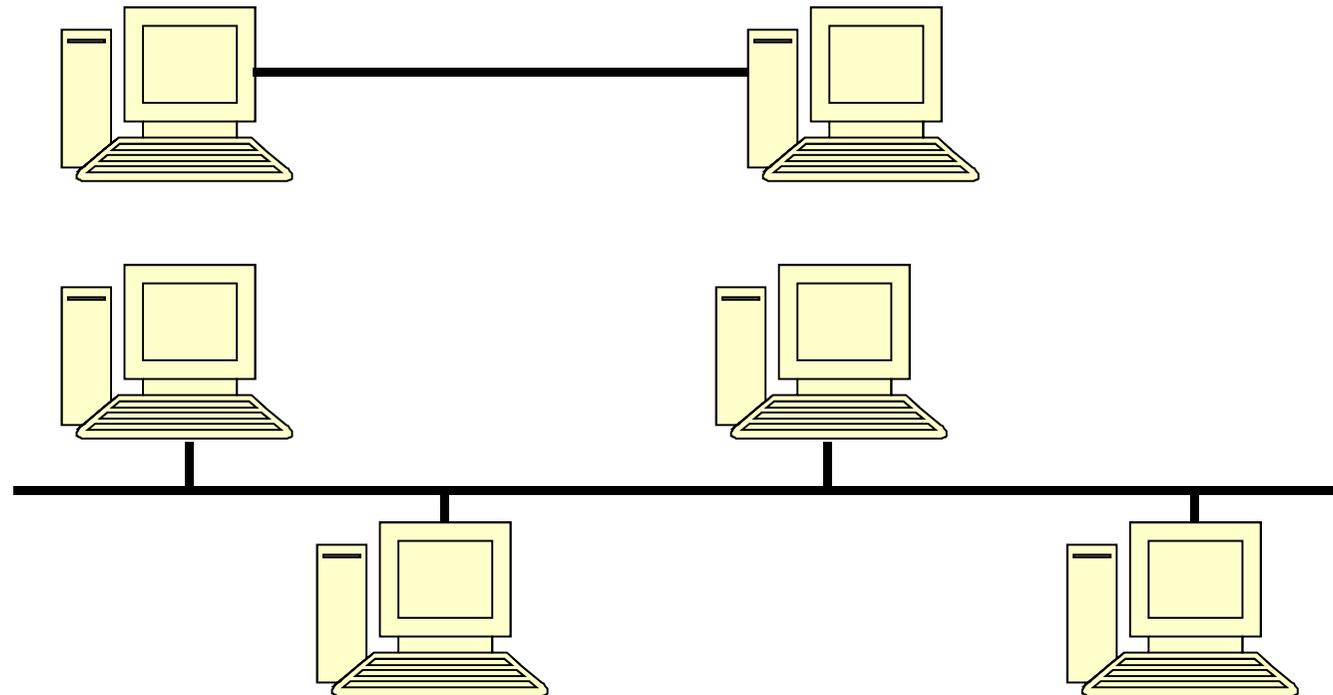

Networks - A bottom up view


□ The Network Layer

- Host-to-host multihop routing of messages
- In the Internet: IP

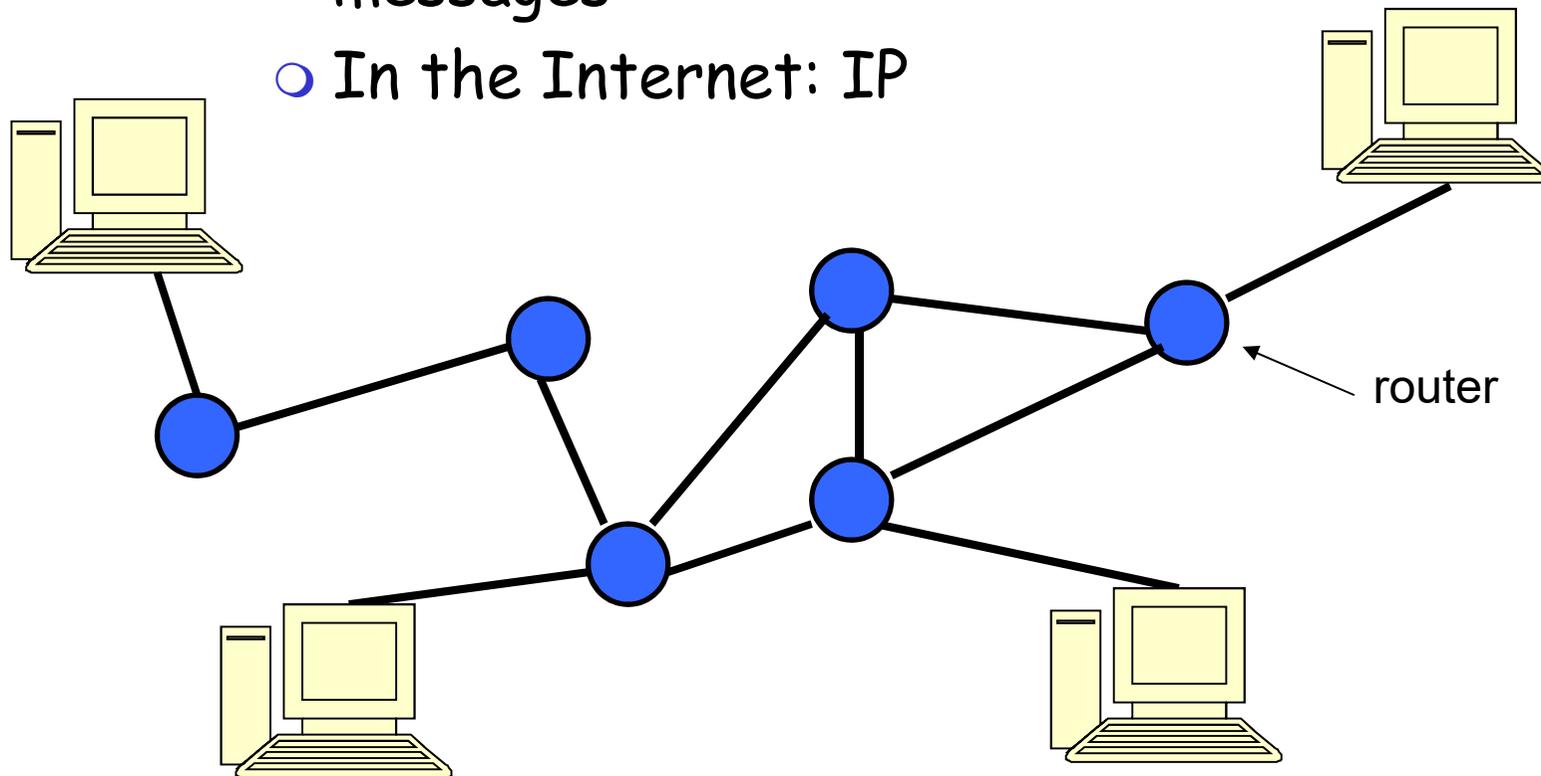

A closer look at network structure: The network core:

- mesh of interconnected routers
- **fundamental question:** how is data transferred through net?
 - **circuit switching:** dedicated circuit per call: telephone net
 - **packet-switching:** data sent thru net in discrete "chunks" (The Internet)

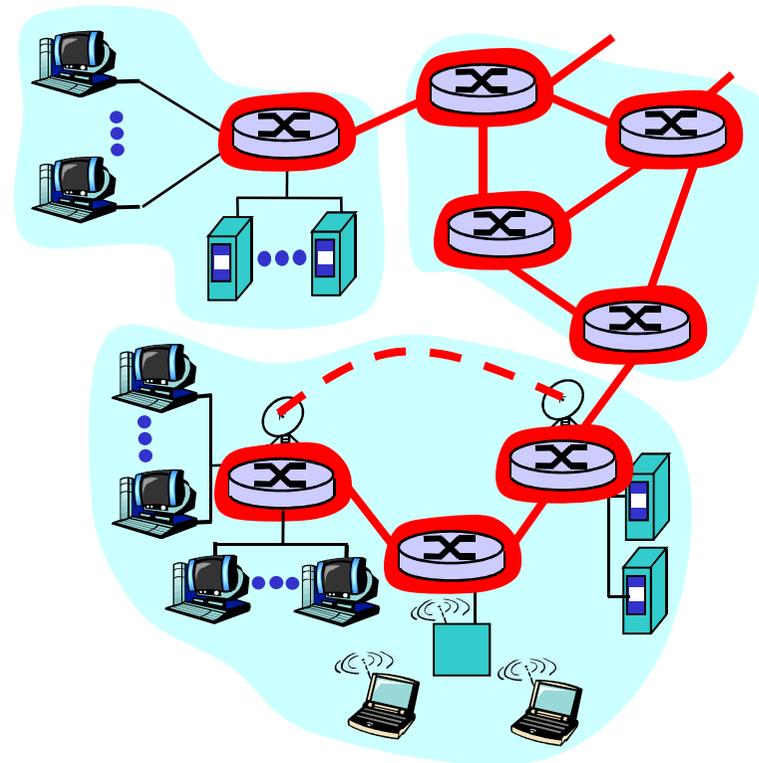

Network Core: Packet Switching

each end-end data stream
divided into *packets*

- ❑ user packets *share* network resources
- ❑ resources used *as needed*

store and forward:

- ❑ packets move one hop at a time
 - transmit over link
 - wait turn at next link

resource contention:


- ❑ aggregate resource demand can exceed amount available
- ❑ congestion: packets queue, wait for link use

Roadmap

- Operating Systems
 - What is an Operating System
 - OS evolution
 - OS details
- **Networking**
 - The Internet
 - Network protocols
 - Security

What's a protocol?


a human protocol and a computer network protocol:

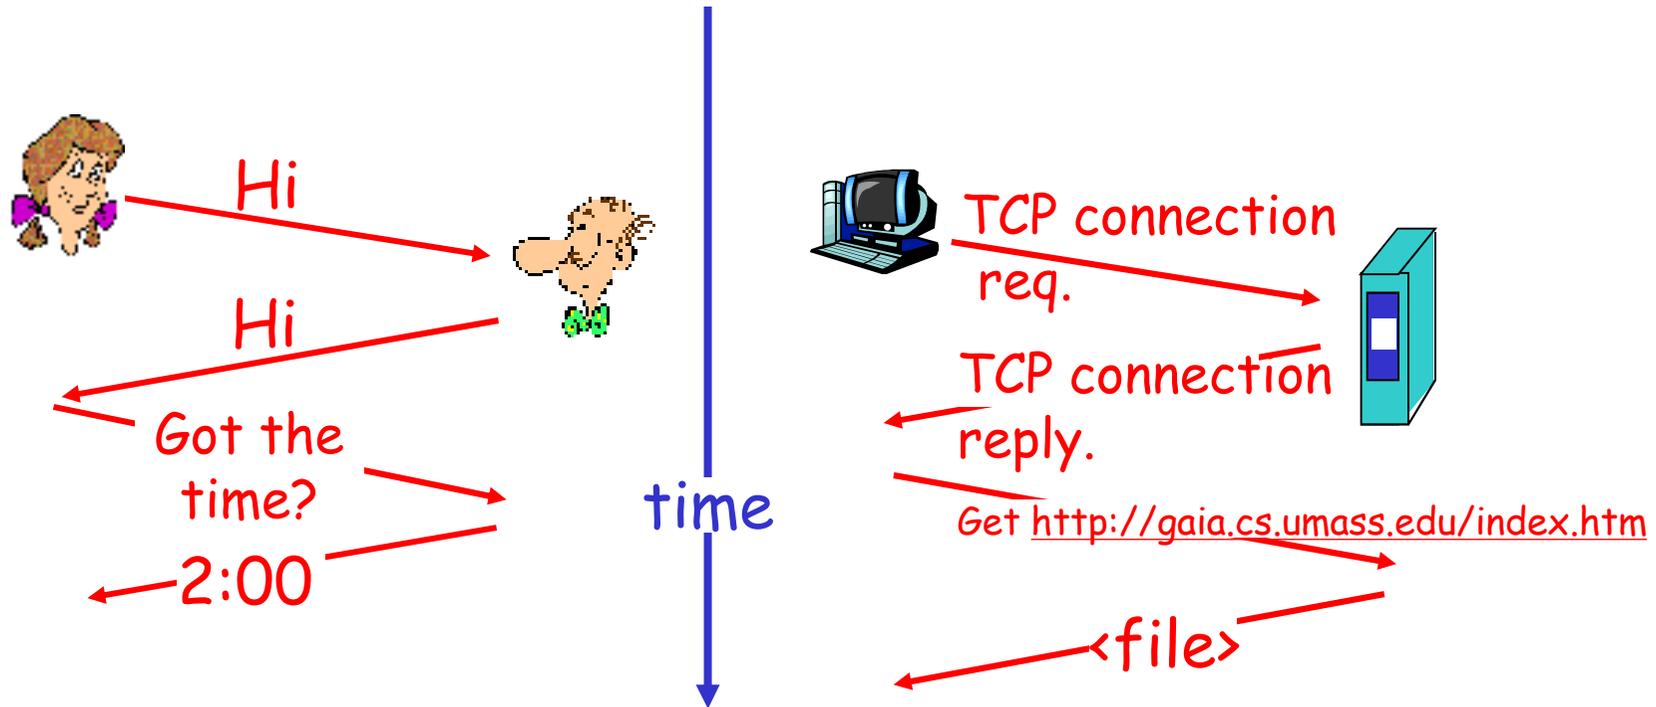


protocols define format, order of msgs sent and received among network entities and actions taken on msg transmission, receipt

Internet protocol stack

- ❑ **application:** ftp, smtp, http, etc
- ❑ **transport:** tcp, udp, ...
- ❑ **network:** routing of datagrams from source to destination
 - IP, routing protocols
- ❑ **link:** data transfer between neighboring network elements
 - ppp, ethernet
- ❑ **physical:** bits "on the wire"

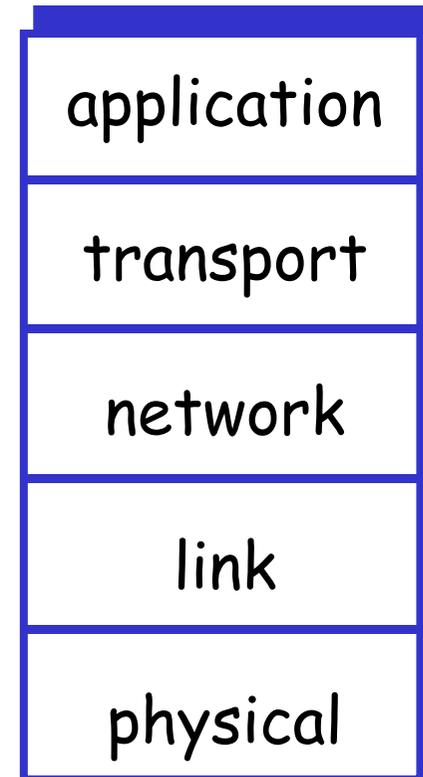


Layering: physical communication

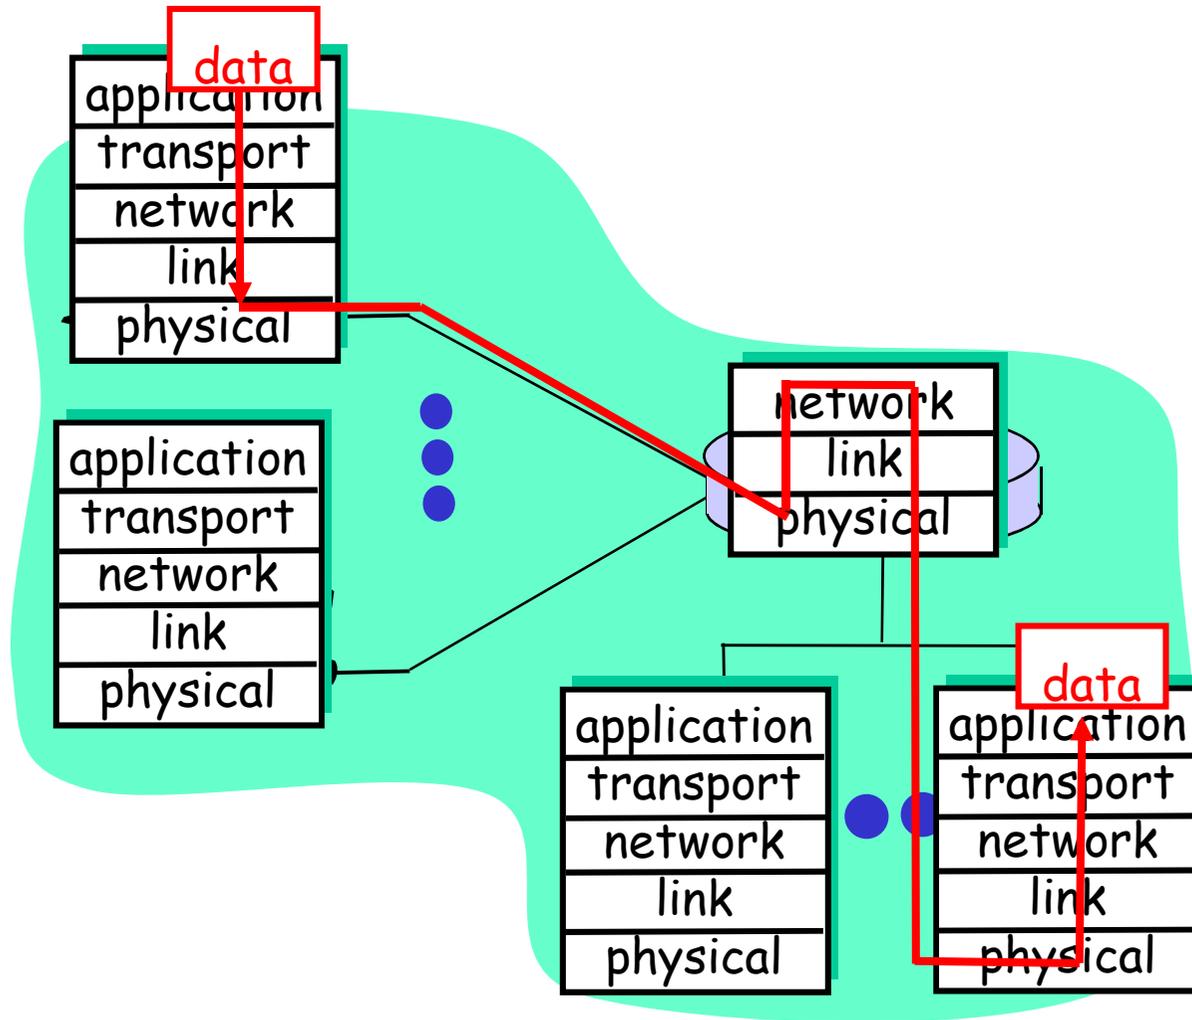

Internet structure: network of networks

- ❑ roughly hierarchical
- ❑ national/international backbone providers (NBPs)
 - e.g. BBN/GTE, Sprint, AT&T, IBM, UUNet
 - interconnect (peer) with each other privately, or at public Network Access Point (NAPs: routers or (ATM) NWs of routers)
- ❑ regional ISPs
 - connect into NBPs
- ❑ local ISP, company
 - connect into regional ISPs

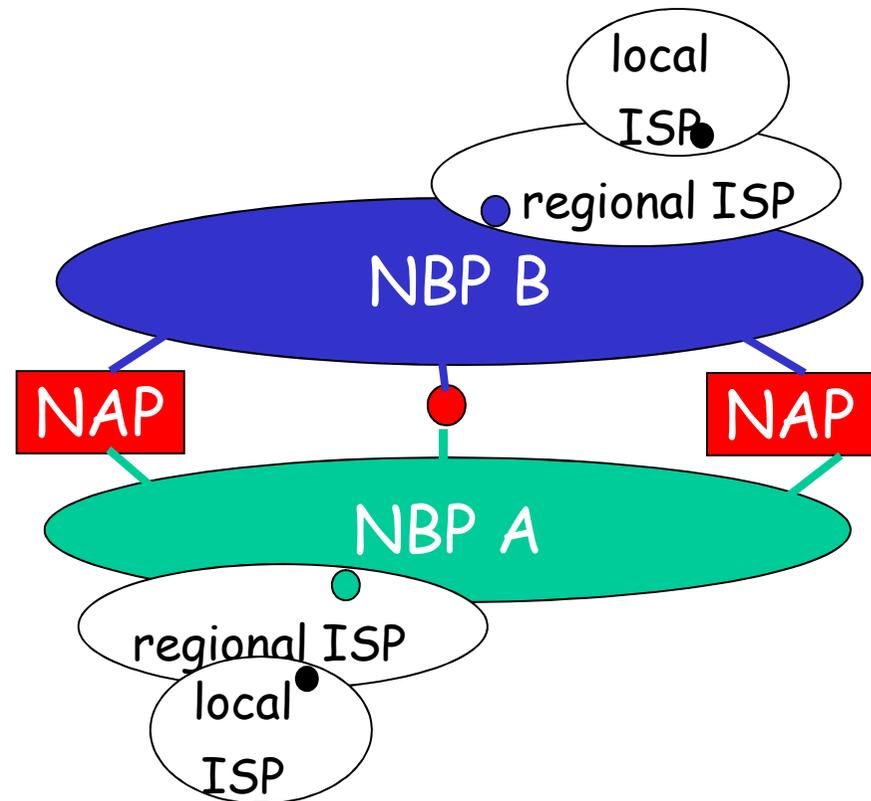

Internet Addressing

- An Internet host is identified by an IP-address
 - A unique 32 bit id number (IPv4)
 - Hierarchical w.r.t. routing
- Domain Name Service (DNS) name
 - Translates Human readable name to IP address
 - Eg: www.chalmers.se → 129.16.71.10

IPv6

- “Normal” IP have 4 billion addresses
 - A lot of them are wasted
 - Chalmers alone have 65535 addresses
- We are running out of addresses
- Solution: IPv6
 - 128 bit addresses
 - 50 billion billion billion addresses / person

Networks - A bottom up view

□ The Transport Layer

- Application-to-application communication

○ The Internet

- **TCP**: connection oriented + reliable + point-to-point
- **UDP**: connectionless + unreliable + point-to-point

Roadmap

- Operating Systems
 - What is an Operating System
 - OS evolution
 - OS details
- **Networking**
 - The Internet
 - Network protocols
 - Security

What is network security?

CIA!

Confidentiality:

only sender, intended receiver should "understand"
message contents

- Encryption!

Integrity of Messages:

sender, receiver want to ensure message not altered
(in transit, or afterwards) without detection


- Digital signatures!

Availability:

System and resources should be available to
(authorized) users

Communication threats


Impersonation (identity spoofing)
Data origin spoofing (insert, probe, scan)

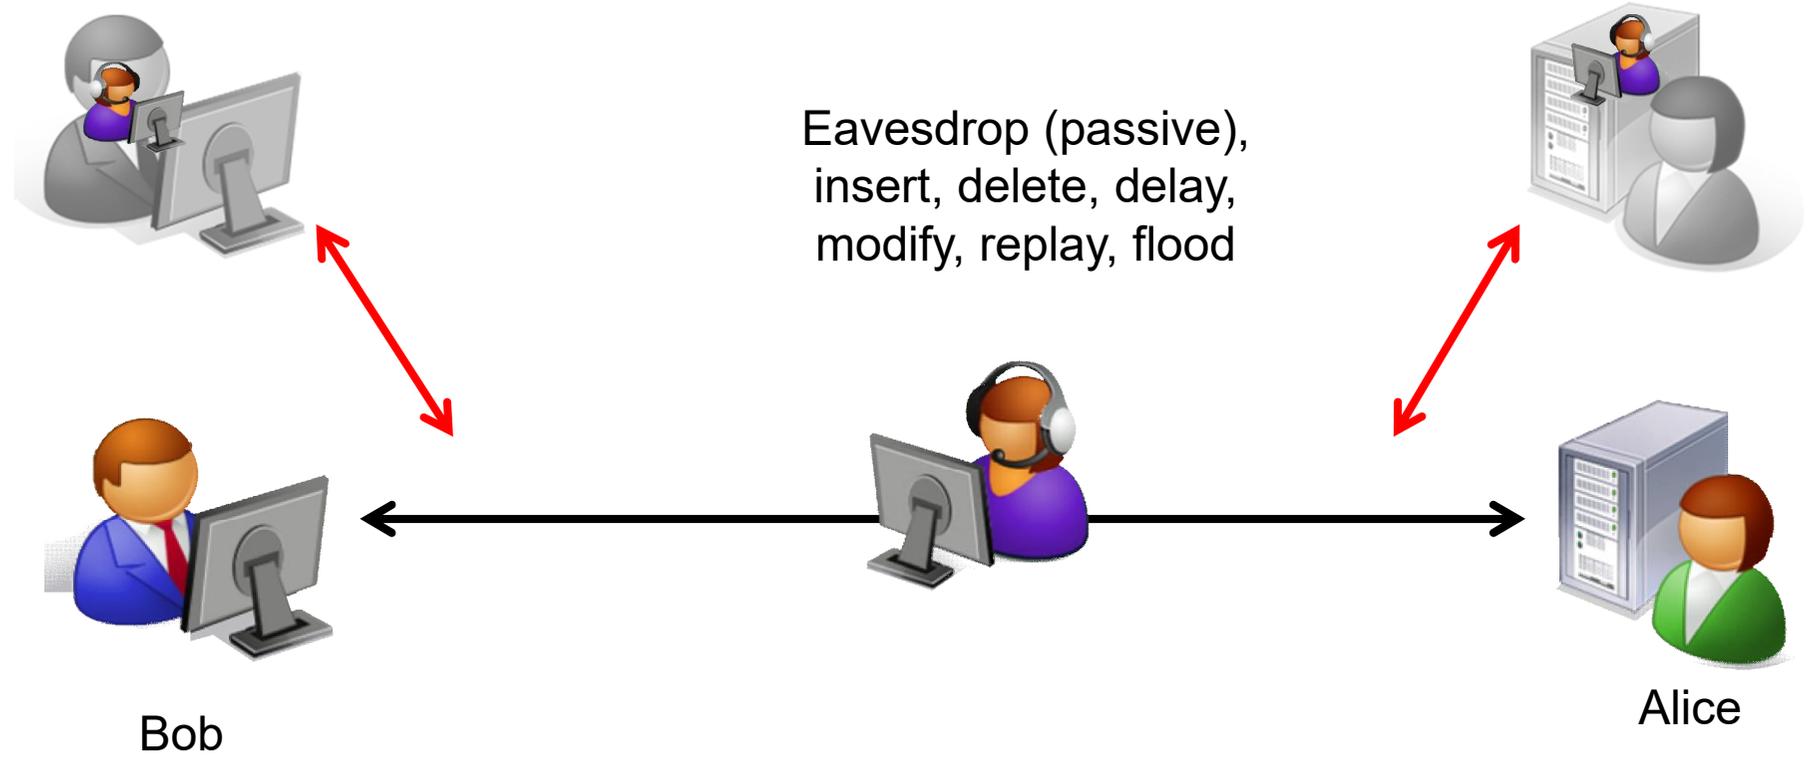

Internet security threats

Packet sniffing:


- broadcast media
- promiscuous NIC reads all packets passing by
- can **read all unencrypted data** (e.g. passwords)
- e.g.: C sniffs B's packets

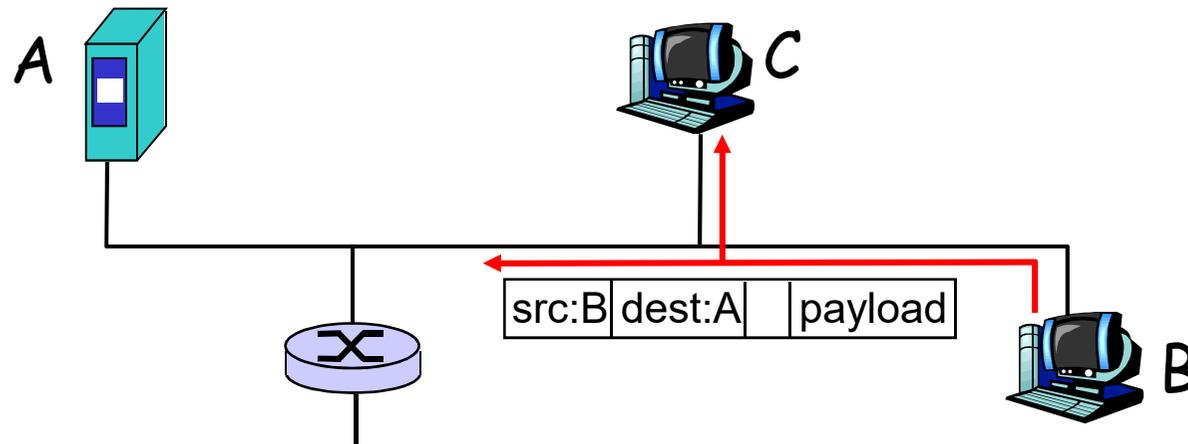

Internet security threats

IP Spoofing:

- can generate "raw" IP packets directly from application, putting **any value into IP source** address field
- receiver can't tell if source is spoofed
- e.g.: C pretends to be B

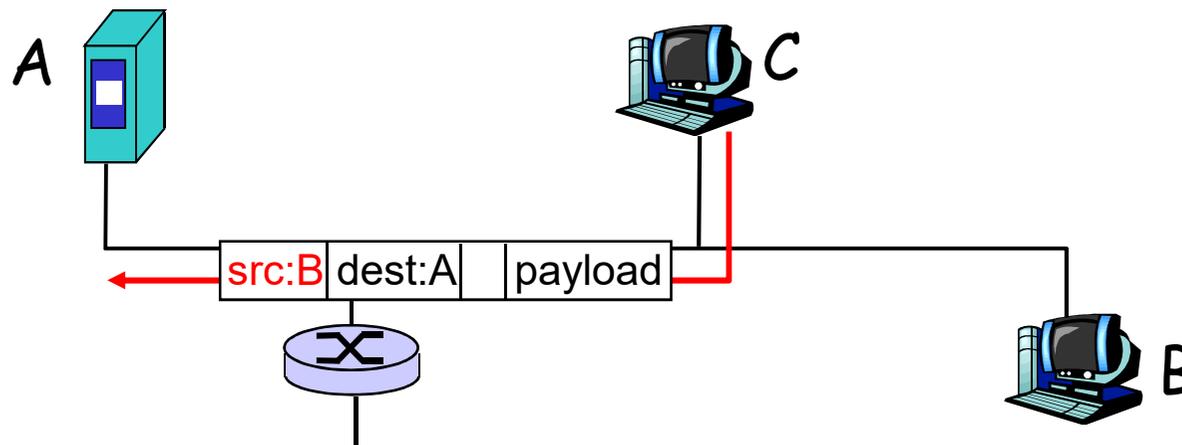

Encryption

- Symmetric
 - Encryption/Decryption with the same key
 - Key distribution a problem
- Public key encryption
 - Encryption with public key
 - Decryption only with private key
 - Key distribution still a problem

Firewalls

firewall

isolates organization's internal net from larger Internet, allowing some packets to pass, blocking others.

Questions?

